

DiskPulse

DISK CHANGE MONITOR



User Manual

Version 18.2


Jun 2026

www.diskpulse.com
info@flexense.com
Flexense Ltd.


1	DiskPulse Overview	3
2	DiskPulse Product Versions.....	5
3	Product Installation	6
4	Using DiskPulse Server GUI Application.....	7
5	Managing Disk Change Monitoring Commands	10
6	Reviewing Monitoring Status and Detected Changes	11
7	Advanced Disk Change Monitoring Options	12
8	Searching File System Changes	13
9	Monitoring Specific Types of Files	15
10	Monitoring Multiple Directories.....	17
11	Excluding Directories from the Monitoring Process.....	18
12	Sending E-Mail Notifications	19
13	Generating Reports and Executing Custom Actions.....	20
14	Disk Change Monitoring Reports	21
15	Graphical PDF Reports	24
16	Saving Reports to the DiskPulse Reports Database	25
17	Displaying Statistical Charts for Series of Reports	26
18	Saving Summary Disk Change Monitoring Reports	28
19	Exporting Changes to an SQL Database	29
20	Saving Reports to an SQL Database	31
21	Automatic Report Management	33
22	Disk Change Monitoring Wizard.....	34
23	Managing File Classification Plug-ins	35
24	Using DiskPulse Enterprise	36
25	Disk Change Monitoring History Statistics.....	39
26	Web-Based Management Interface	40
27	DiskPulse Server Disk Space Monitor	41
28	Using DiskPulse Server Command Line Utility	43
29	Configuring DiskPulse Server.....	46
30	Configuring Custom User Name, Password and Ports	46
31	DiskPulse Server Report Management.....	47
32	Configuring E-Mail Server.....	47
33	Updating DiskPulse Server	48
34	Registering DiskPulse Server	49
35	DiskPulse Enterprise OEM Version	50
36	Installing MySQL Database.....	51
37	Configuring MySQL Database.....	56
38	Installing and Configuring MySQL ODBC Data Source	57
39	Configuring DiskPulse Database Connection	58
40	Supported Operating Systems	59
41	System Requirements.....	59

1 DiskPulse Overview

DiskPulse is a powerful real-time disk change monitoring solution allowing one to monitor changes in one or more disks and directories, send E-Mail notifications, save various types of reports, generate statistical pie charts, export detected changes to an SQL database, send error messages to the system event log and execute custom commands when a user-specified number of changes detected.

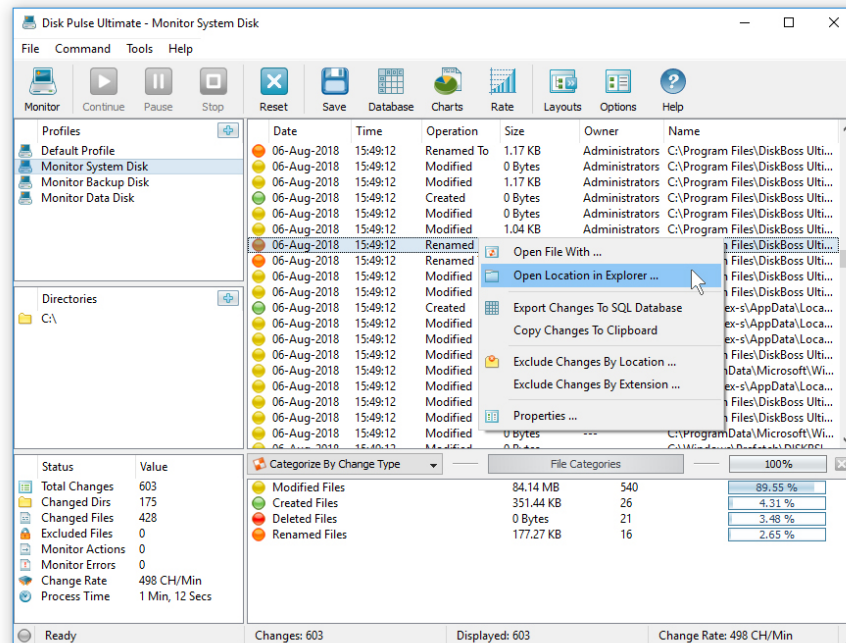

DiskPulse intercepts file system change notifications issued by the operating system and detects newly created files, modified files, deleted files and renamed files. All file system changes are detected in real-time allowing one to send an E-Mail notification, execute a custom command and/or save a disk change monitoring report within a couple of seconds after one or more critical changes detected.

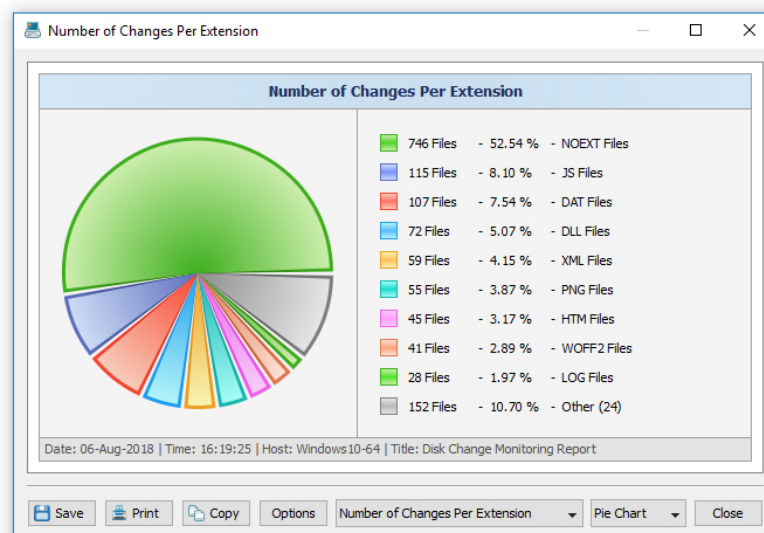

The user is provided with the ability to review, categorize and filter detected file system changes, generate various types of statistical pie charts showing the number of changes per file extension, the number of changes per change type, the number of changes per user, etc.

In addition to the DiskPulse GUI application, DiskPulse Server provides a command line utility, which can be used to execute disk change monitoring operations locally and control one or more DiskPulse Servers through the network. The DiskPulse command line utility provides the ability to control disk change monitoring operations from shell scripts and batch files and allows one to integrate DiskPulse capabilities into user-custom solutions.

```

c:\Program Files\Disk Pulse Ultimate\bin>diskpulse

DiskPulse Version 11.0.34 (Aug 6 2018)

Command Line Syntax:

diskpulse -execute <Command Name>

    Executes the specified disk change monitoring command.

diskpulse -monitor -dir <Directory 1> ... <Directory X>

    Starts monitoring the specified directories.


diskpulse -show_commands

    Shows the list of configured disk change monitoring commands.

diskpulse -server_status

    Shows the DiskPulse server status.
  
```

IT professionals and enterprise customers are provided with DiskPulse Server - a server-based product version, which runs in the background as a service and can be controlled using a full-scale client GUI application or a command line utility locally or through the network. DiskPulse Server allows one to monitor multiple disks or directories simultaneously, send disk change monitoring reports to a centralized SQL database and generate history trend analysis reports.

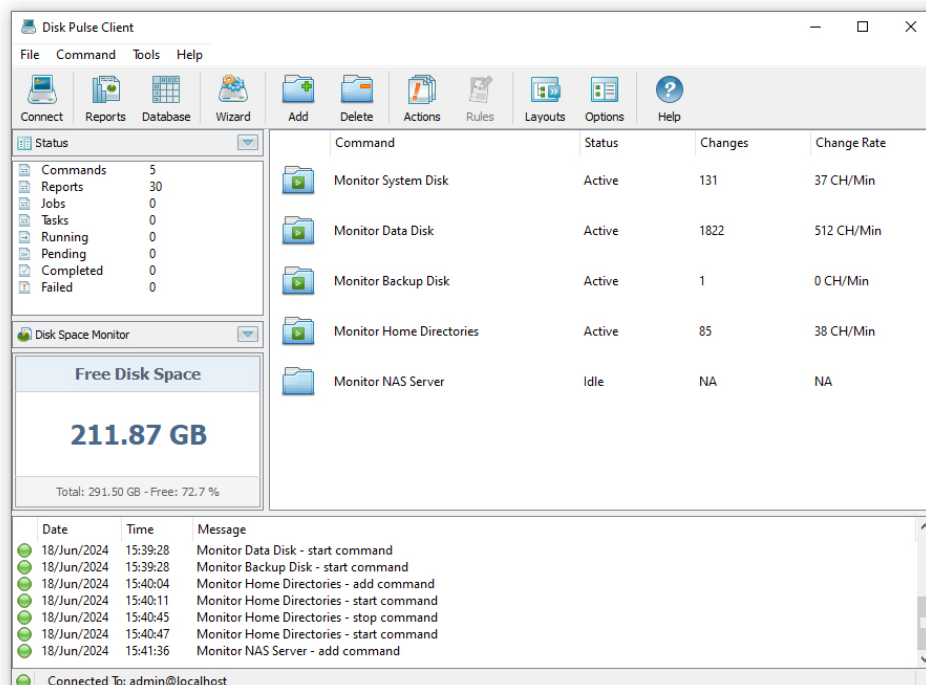

Finally, corporate customers are provided with the DiskPulse Enterprise product version, which is capable of receiving disk change monitoring reports from multiple production servers, searching critical changes across the entire database, analyzing reports using a centralized set of user-defined rules and policies and sending E-Mail notifications when critical issues are detected in one or more disk change monitoring reports received from production servers.


2 DiskPulse Product Versions

Features	Server	Enterprise
Maximum Number of Files	100 M	Unlimited
Maximum Storage Capacity	100 TB	Unlimited
Maximum Number of Monitors	100	Unlimited
Support for Unicode File Names	Yes	Yes
Support for Long File Names	Yes	Yes
Monitor Multiple Disks or Directories	Yes	Yes
User-Selectable Monitoring Events	Yes	Yes
File Categories and File Filters	Yes	Yes
HTML, PDF, Excel, Text and XML Reports	Yes	Yes
Option to Send E-Mail Notifications	Yes	Yes
Option to Execute Custom Commands	Yes	Yes
Option to Monitor Specific File Types	Yes	Yes
SQL Database Reports	Yes	Yes
Search Changes in the Database	Yes	Yes
Disk Monitoring Command Line Utility	Yes	Yes
Runs in the Background as a Service	Yes	Yes
Multiple, Parallel Monitoring Operations	Yes	Yes
Built-In Disk Space Monitor	Yes	Yes
DiskPulse Client GUI Application	Yes	Yes
OEM Product Version	x	Yes
Centralized Reports Database	x	Yes
Centralized Reports Analysis Rules	x	Yes
Disk Change Monitoring History Statistics	x	Yes
Web-Based Management Interface	x	Yes
Support For Multi-User Configurations	x	Yes
OS Native User Authentication	x	Yes
Price	\$125	\$450


* Product features, prices and license terms are subject to change without notice.

3 Product Installation

DiskPulse Server is especially designed to be as simple as possible. The product does not require any third-party software applications and may be installed and configured within a couple of minutes. A fully functional 30-days trial version of DiskPulse Server may be downloaded from the following page: <https://www.diskpulse.com/downloads.html>.

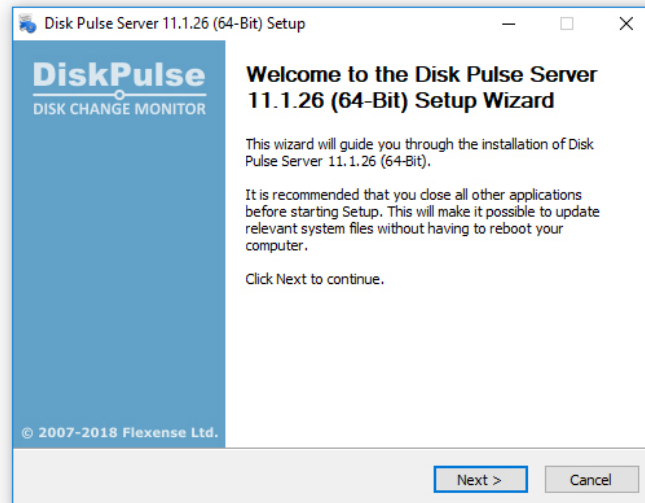

The installation package is very small, approximately 15 MB depending on the target operating system, and the product requires just 100 MB of the free disk space on the target server. In order to install DiskPulse Server, start the setup program, select a destination directory and press the 'Next' button.

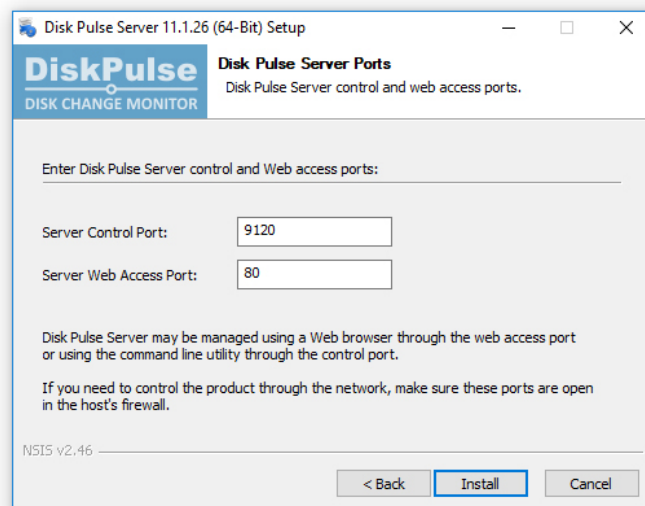


Optionally, enter custom server control and/or web access ports. The server control port is used by the DiskPulse client GUI application and the command line utility to connect to DiskPulse Server. The web access port is the port for the web-based management interface allowing one to control DiskPulse Server using a standard web browser from any computer on the network. If DiskPulse Server should be controlled remotely through the network, make sure one or both of these ports are open in the server's firewall. In order to perform a silent product installation procedure, download the latest product version, open the command prompt window and type the following command:


diskpulsesrv_setup_vX.Y.Z.exe /S

4 Using DiskPulse Server GUI Application

DiskPulse Server is a server-based product version, which runs in the background as a service and allows one to perform multiple, parallel disk change monitoring operations, send E-Mail notifications, save various types of reports, export detected changes to a centralized SQL database, send error messages to the system event log and/or execute custom user commands when a user-specified number of changes detected.

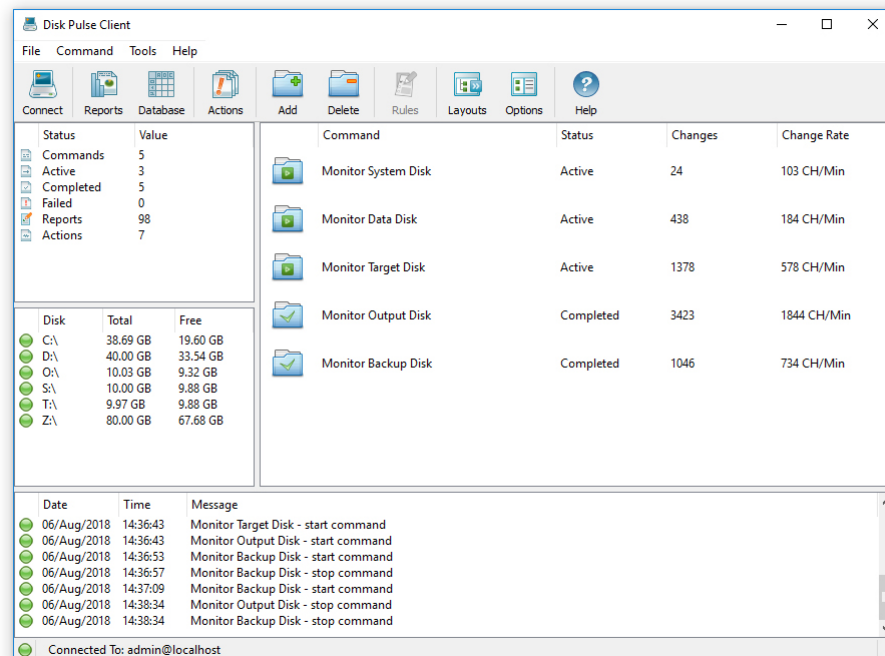


DiskPulse Server may be controlled using a full-scale client GUI application or a command line utility locally or through the network. The DiskPulse client GUI application is very similar to the desktop product version, but provides the ability to configure multiple, parallel disk change monitoring operations and adds advanced statistics and history trend analysis capabilities.

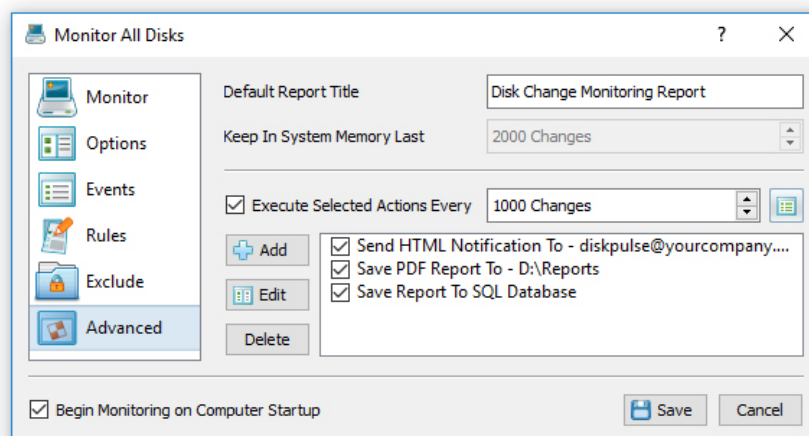


DiskPulse Server is especially designed to run on production servers using a very small amount of system memory and CPU resources in order to minimize the potential impact on running applications. For mission-critical servers, DiskPulse provides the ability to completely offload disk change monitoring reports management and analysis to a centralized DiskPulse database server, which can receive reports from multiple production servers, analyze detected changes using user-specified rules and policies, send notifications and/or save reports when critical changes are detected.

The DiskPulse client GUI application connects to DiskPulse Server locally or through the network and allows one to setup disk change monitoring operations, configure reports, E-Mail notifications and/or custom user commands to be executed when a user-specified number of changes detected.

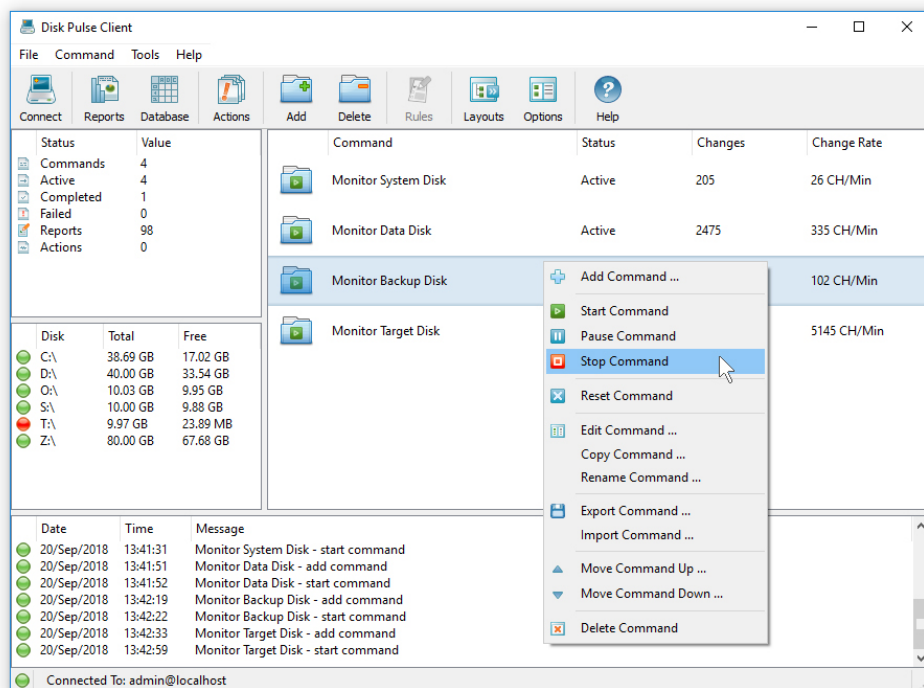


The client GUI application provides an easy-to-use interface, which is very similar to the DiskPulse desktop GUI application. The user is provided with the ability to review and analyze detected file system changes, save report files and/or export disk change monitoring reports to a centralized SQL database through the ODBC interface.

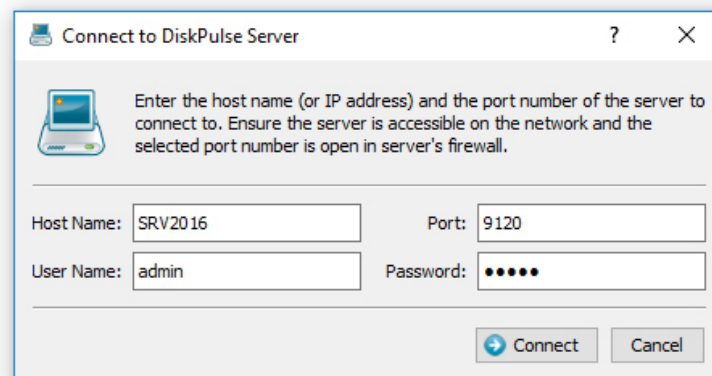


In order to connect to a DiskPulse server, open the DiskPulse client GUI application, press the 'Connect' button located on the main toolbar, enter the host name (or an IP address) of the server to connect to, enter DiskPulse user name and password (default is **admin/admin**) and press the 'Connect' button. By default, DiskPulse client GUI application connects to DiskPulse Server through the TCP/IP port 9120. If the default DiskPulse server control port is used by another software product or system service, open the server 'Options' dialog, select the 'Server' tab and change the DiskPulse server control port. In order to be able to connect to the server through the network, make sure that the port is open in the host's firewall.

By default, in order to ensure all disk change monitoring operations are automatically started when the computer starts, DiskPulse Server enables the auto-start mode for all disk change monitoring operations. In order to manually start one or more disk change monitoring commands using the client GUI application, connect to the DiskPulse Server, select the required disk change monitoring commands in the commands view, press the right mouse button and select the 'Start Command' menu item.

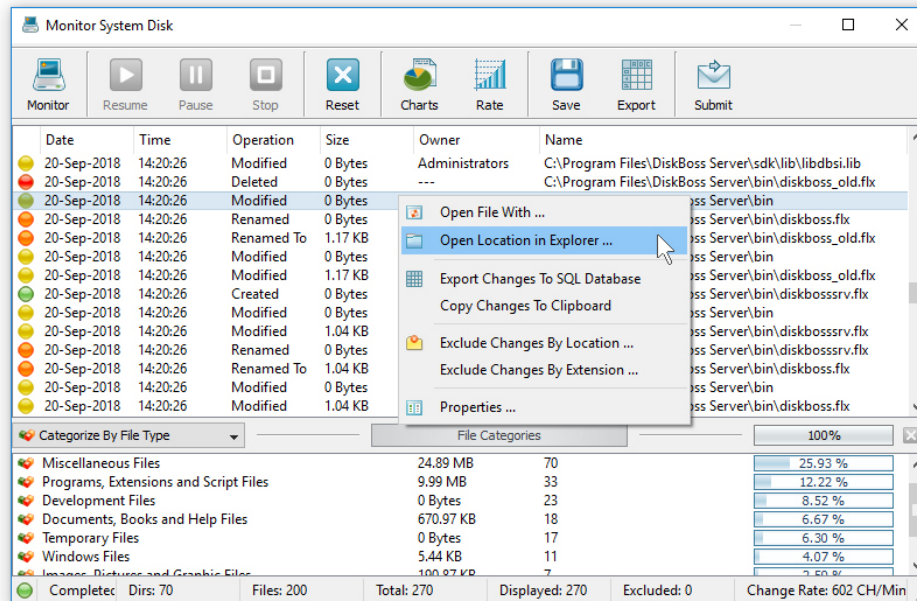


In order to review detected file system changes, just click on a disk change monitoring command item in the commands view. For each detected file system change, the monitoring results dialog shows the date, time, type of change, file size, file owner and the name of the changed file or directory. In addition, the bottom view shows categories of detected changes according to the currently selected file categorization mode.

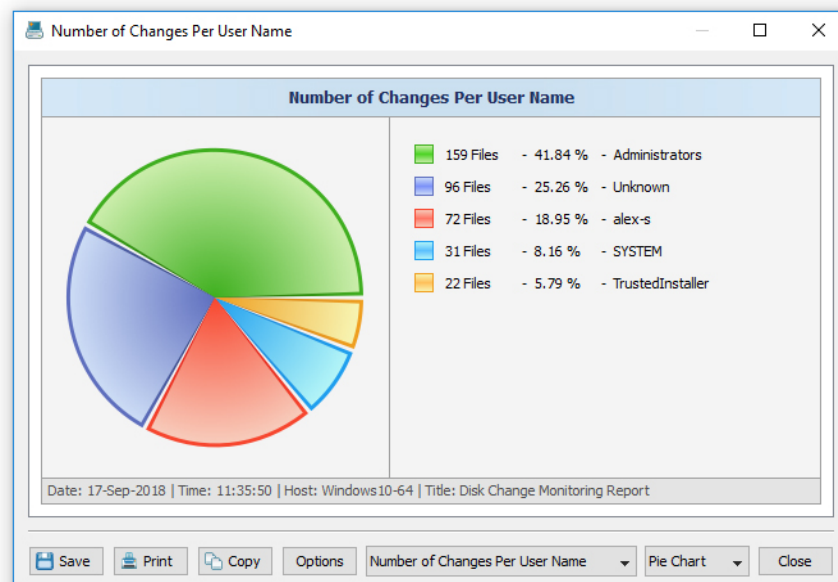


The monitor results dialog provides the ability to categorize and filter detected file system changes, save various types of disk change monitoring reports and generate pie charts showing the number of changes per category according to the currently selected file categorization mode.

5 Managing Disk Change Monitoring Commands

DiskPulse Server provides the ability to setup a number of disk change monitoring commands with each one configured to monitor one or more disks and/or directories. The DiskPulse Server commands view shows the configured disk change monitoring commands and allows one to start, stop, add, edit and delete disk change monitoring commands and configure advanced disk change monitoring options.

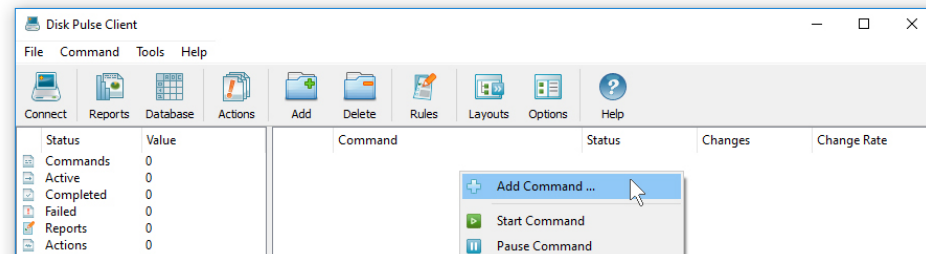


In order to add a new disk change monitoring command, press the 'Add' button located on the main toolbar, enter a unique command name, specify one or more directories to monitor and press the 'Save' button.

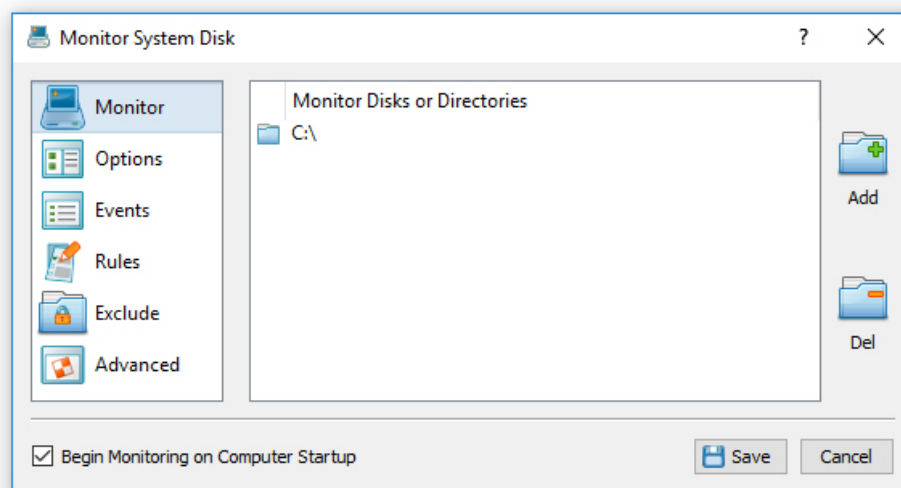


The newly created disk change monitoring command will be displayed in the commands view and in order to start the monitoring command, select the command item, press the right mouse button and select the 'Start Command' menu item. DiskPulse Server provides a large set of advanced disk change monitoring options allowing one to customize monitoring operations for user-specific needs and requirements. In order to customize advanced disk change monitoring options, select the command item, press the right mouse button and select the 'Edit Command' menu item.

6 Reviewing Monitoring Status and Detected Changes

In order to view the disk change monitoring results for a monitoring command, click on the command item in the commands view. The monitoring command dialog shows the detected disk changes and allows one to categorize and filter detected disk changes, display different types of statistical charts, save disk change monitoring reports to a number of different report formats including HTML, PDF, Excel, text, JSON, CSV, XML and export disk change monitoring results to an SQL database.

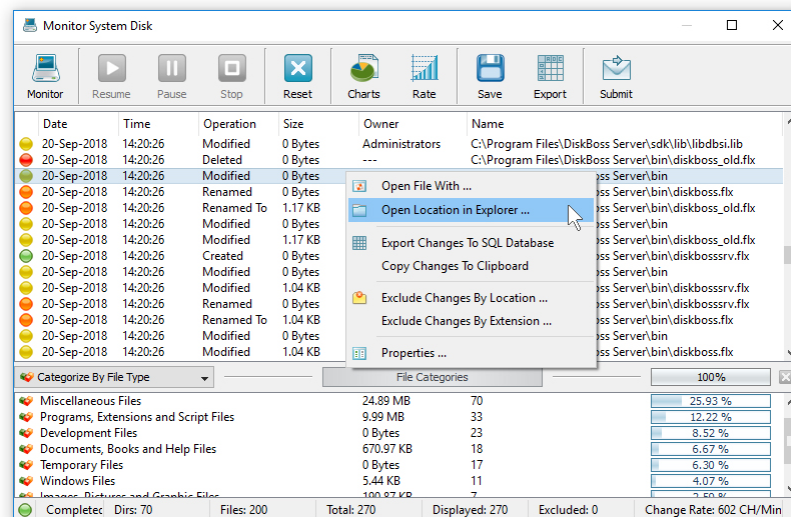


For each detected disk change, the top view shows the change date and time, change type, the size of the changed file, the owner of newly created or modified files and the full name of the changed file or directory. The bottom view shows categories of detected changes according to the currently selected file categorization mode. By default, DiskPulse categorizes changed files by the file extension. In addition, the user is provided with the ability to categorize and filter changed files by the change type, file type, file owner, file size, file attributes, top-level directory or user-custom rules.

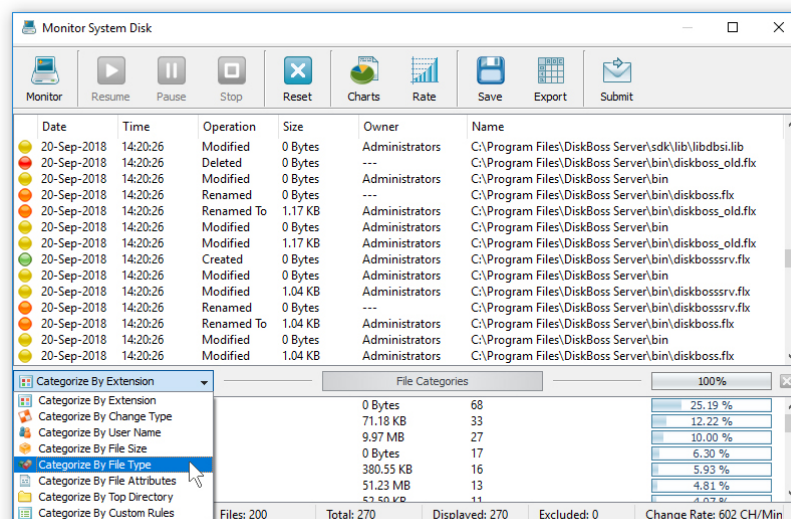


In order to change the file categorization mode, click on the categories combo box and select an appropriate file categorization mode. For example, in order to categorize changed files by the file owner, select the 'Categorize By User Name' mode. In addition, the user is provided with the ability to filter changed files by one or more selected categories. For example, select a category in the bottom view, press the right mouse button and select the 'Apply Filter' menu item. DiskPulse will filter changed files and show changes related to the selected category.

7 Advanced Disk Change Monitoring Options

DiskPulse provides a large number of advanced disk change monitoring options allowing one to control specific types of file system changes to monitor, which types of files to monitor and allows one to automatically save reports and/or send E-Mail notifications when a user-specified number of changes detected.

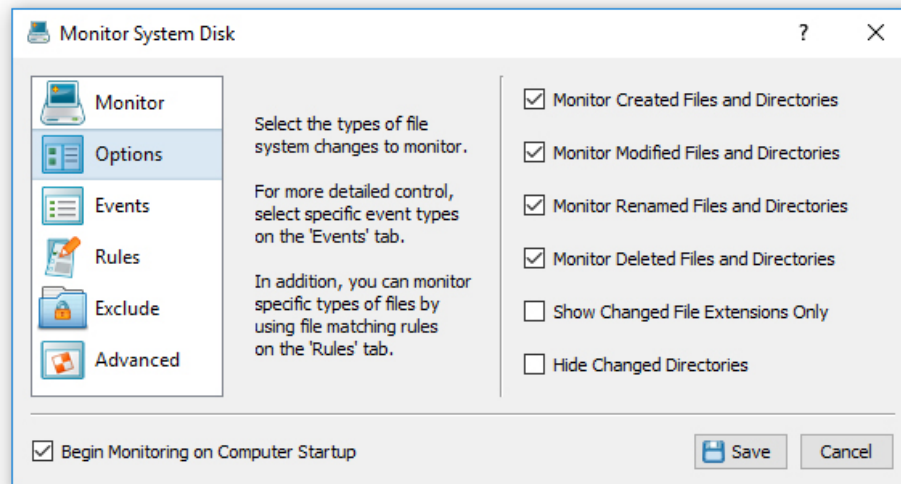


In order to edit advanced disk change monitoring options, select the disk change monitoring command, press the right mouse button and select the 'Edit Command' menu item. The disk change monitoring command dialog provides the ability to select the types of disk changes that should be monitored, types of files that should be monitored, the number of file system changes to keep in system memory, the number of changes to trigger automatic report generation and E-Mail notification actions and a user-defined list of actions to execute when the specified number of changes detected.

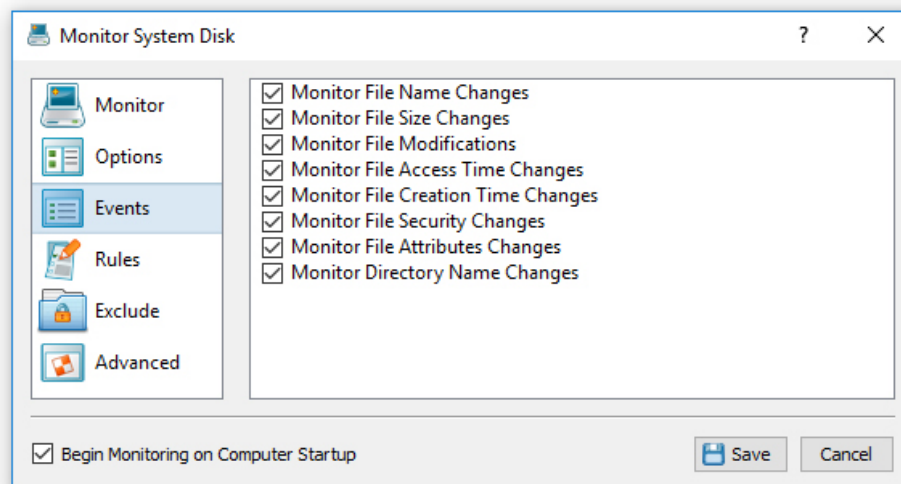


In order to configure which types of disk changes to monitor, open the disk change monitoring command dialog and select the 'Options' tab. By default, DiskPulse monitors all types of file system changes, but in some situations, the user may need to focus on very specific types of changes. For example, in order to monitor file delete operations only, unselect created files, modified files and renamed files change notifications.

8 Searching File System Changes


DiskPulse allows one to search file system changes by the file name, category, modification date, file owner, file size, etc. in all disk change monitoring reports stored in an SQL database. In order to search file system changes in the DiskPulse Server reports database, open the database dialog and press the 'Search' button. In order to search file system changes in the reports database, press the 'Search' button located on the main toolbar.

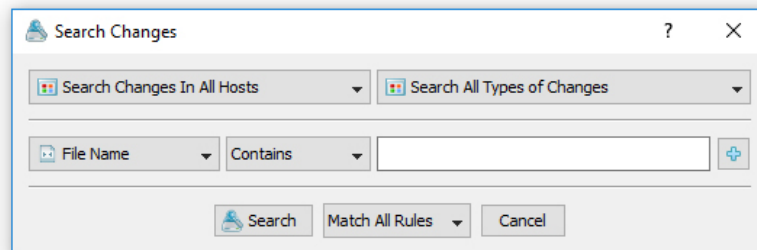


The host selector, located in the top-left corner of the search dialog, provides the ability to search changes in disk change monitoring reports submitted from all hosts or to select a specific host name to search for. The change type selector, located in the top-right corner of the search dialog, allows one to search for all types of file system changes or to select a specific change type such as: created files, modified files, renamed files or deleted files.

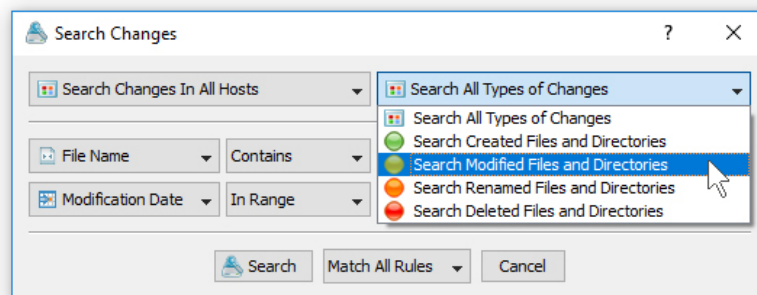


DiskPulse is capable of searching file system changes by one or more search rules which may be configured to find changes by the file name, extension, location, category, file size, file owner and modification date. Also, advanced users are provided with the ability to create hierarchical search rules with logical operators allowing one to find very specific changes.

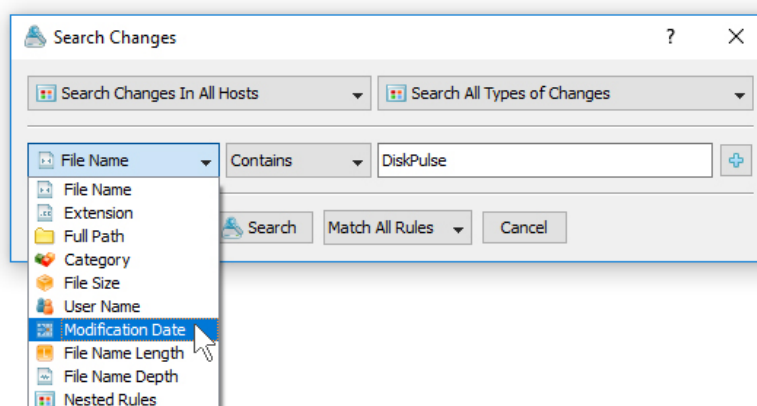

For example, in order to search for all changed programs, executable files and DLL libraries, select the 'Category' file search rule and press the '...' button to browse for available file categories.

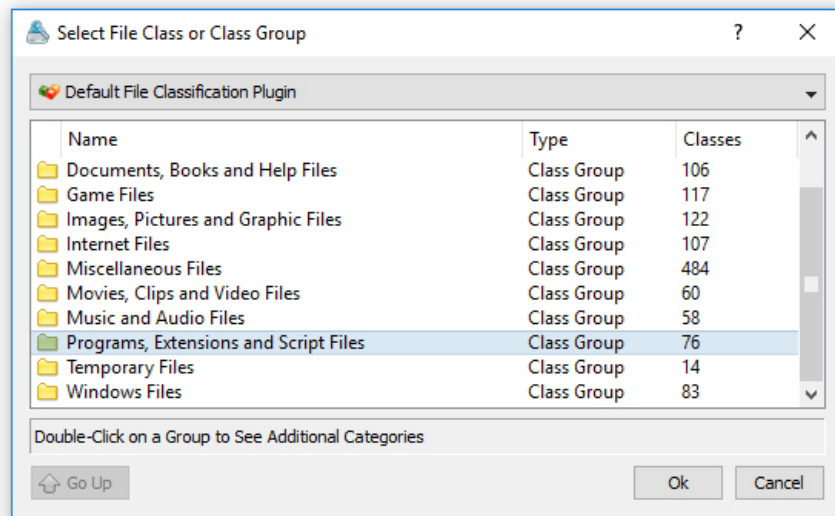


On the 'Categories' dialog, select the 'Programs, Extensions and Script Files' file category and press the 'Ok' button. If required, add a date range rule to find changes that occurred during a specific time interval or a location rule to find changes in a specific location such as the Windows system directory, etc.

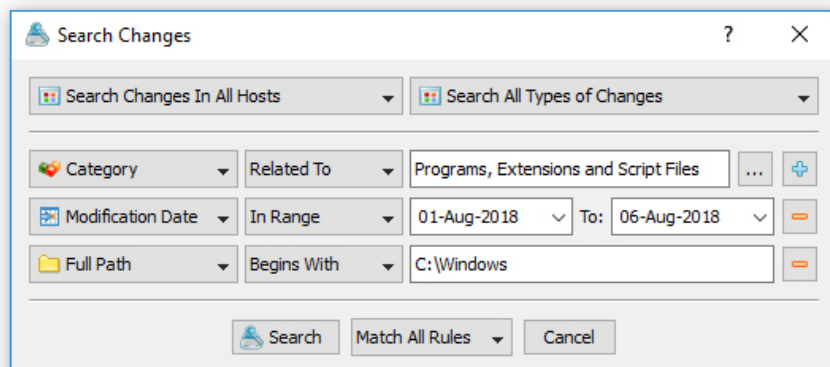


Once finished adding search rules, press the 'Search' button and wait for the search operation to complete. Search results are displayed in the standard disk change monitoring results window allowing one to categorize and filter results, save HTML, text, Excel CSV or XML reports and generate pie and/or bars charts.

9 Monitoring Specific Types of Files

DiskPulse provides power users and IT administrators with the ability to monitor specific types of files according to one or more user-specified file matching rules. For example, the user can specify to monitor changes in program files and DLL libraries located in the Windows system directory.

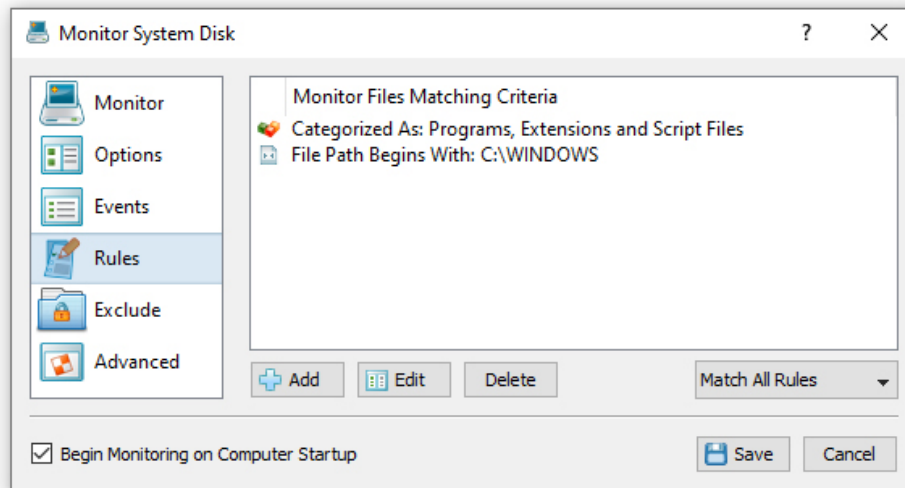


In order to add one or more file matching rules, open the disk monitoring command dialog, select the 'Rules' tab and press the 'Add' button. On the 'Rules' dialog select an appropriate rule type and specify all the required parameters. During the disk monitoring operation, DiskPulse will monitor the input directories and apply the specified file matching rules to all changed files. Files not matching the specified rules will be skipped and the disk monitoring results view will contain user-selected files only.

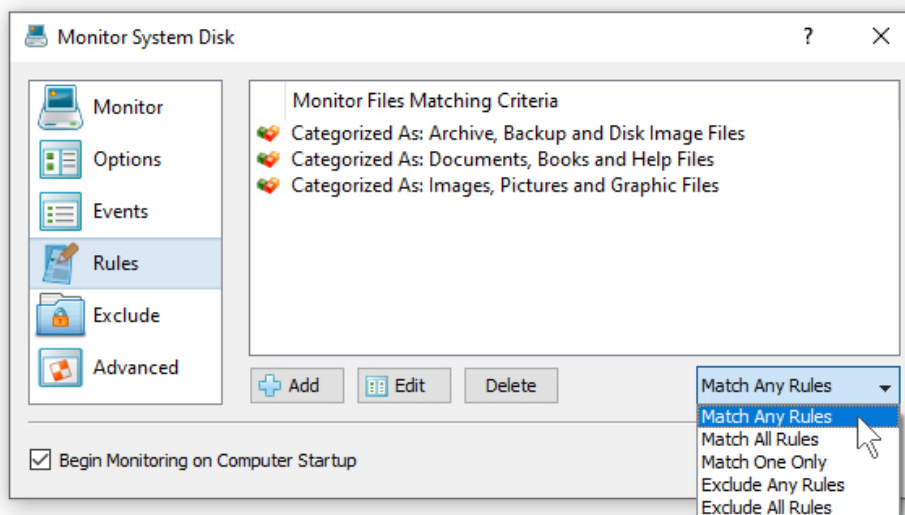


Sometimes, it may be required to monitor a number of different types of files and skip all the other disk changes. In this case, the user can add multiple file matching rules with each one selecting a specific type of files and then set the rules logic to 'Match Any Rules'.

Another option to specify which types of files to monitor is to use the file extension rule, which provides the ability to select files by one or more file extensions. Press the 'Add' button on the 'Rules' tab, select the 'File Extension' rule type, set the rule operator to 'Equals' and enter up to 6 file extensions per rule to match.

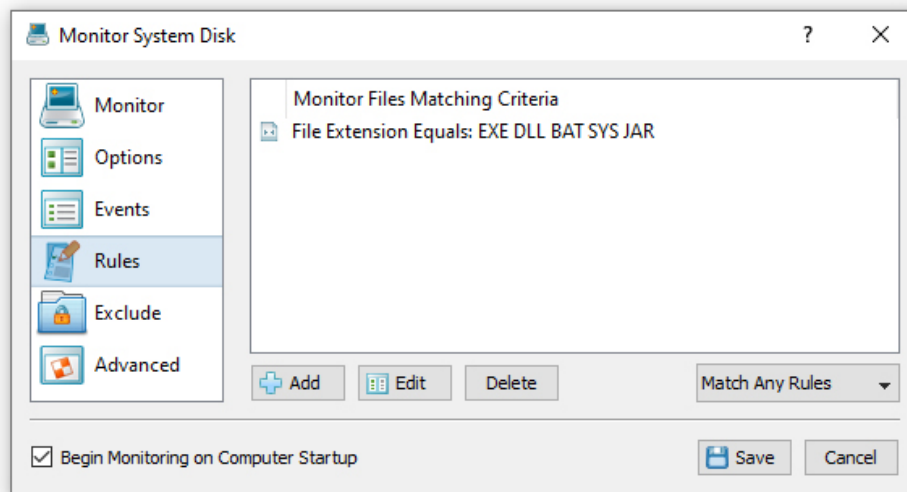


In addition, the user is provided with the ability to exclude files from the monitoring operation using one or more file matching rules. For example, in order to exclude temporary and backup files by the file extension, add the file extension rule, set the rule operator to 'Equals', set the list of file extensions to 'TMP TEMP BAK' and then set the rules logic to 'Exclude Any Rules'.

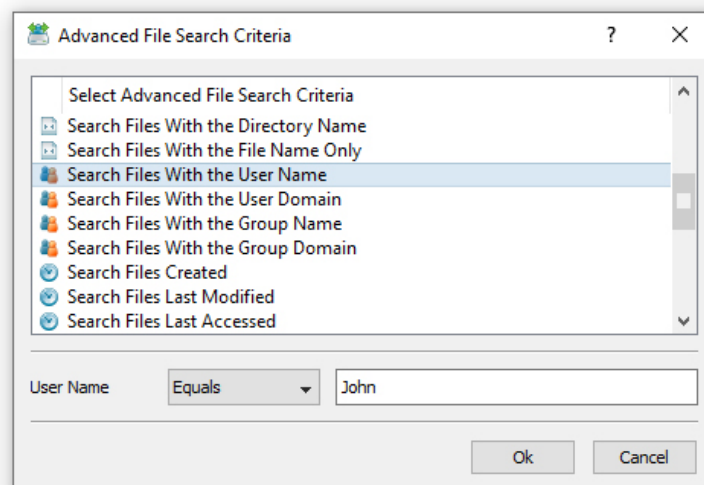

In multi-user environments, DiskPulse provides the ability to monitor files by the user name, user group or domain name. For example, in order to monitor files owned by a specific user, open the disk change monitor command options dialog, select the 'Rules' tab, select the 'Search Files With User Name' and enter the user name to search for.


In addition to the positive file matching rules, DiskPulse provides negative file matching rules allowing one to exclude files matching the specified criteria. For example, in order to exclude all files owned by any member of the 'Administrators' user group, open the disk change monitor command options dialog, select the 'Rules' tab, select the 'Search Files With Group Name', set the rule operator to 'Not Equal' and enter the 'Administrators' group name.

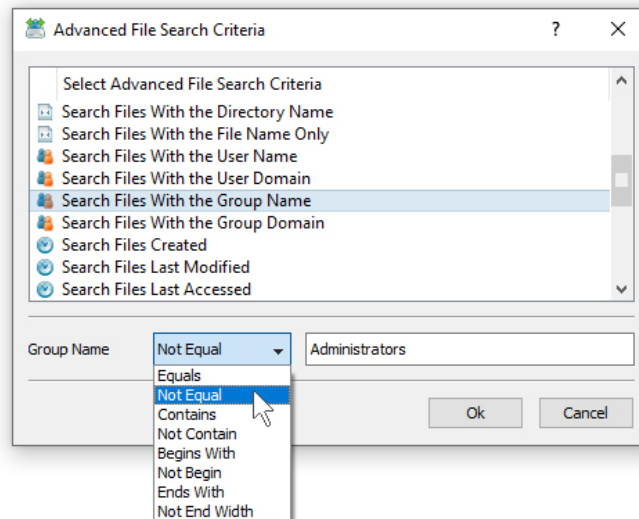

One of the most powerful features of the DiskPulse file matching rules is the ability to combine multiple types of rules allowing one to precisely select which files should be monitored and which files should be excluded from the disk change monitoring process. For example, the user can configure a disk change monitoring command to monitor all types of programs or executable files, which were created by any regular user, but not by Administrators.

10 Monitoring Multiple Directories


DiskPulse is capable of monitoring multiple disks or directories. In order to monitor multiple directories, press the 'Manage Profile' button, which is located on the right side of the profile selector combo box and specify all the disks or directories that should be monitored.

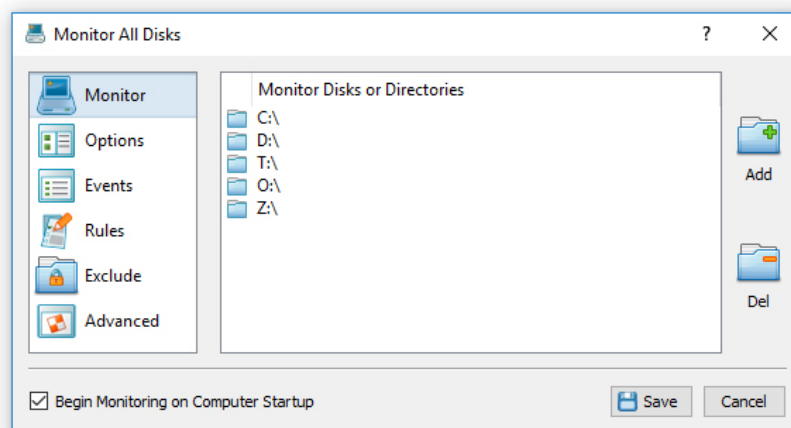

All the specified disks and/or directories, including all subdirectories, will be monitored simultaneously and all file system changes will be reported in a single, interleaved view. Users requiring separate change lists for multiple disks or directories may start multiple instances of the DiskPulse GUI application and select a different monitoring profile in each of them. Another option is to start the monitoring operation is using the standard the Windows Explorer application. Open Windows Explorer, select one or more disks or directories to monitor, press the right mouse button and select the 'DiskPulse – Monitor Changes' menu item.

11 Excluding Directories from the Monitoring Process

DiskPulse provides the ability to exclude one or more directories from the disk change monitoring process. In order to configure exclude directories for a disk change monitoring operation, open the monitoring profile dialog, select the 'Exclude' tab and add one or more directories to exclude.

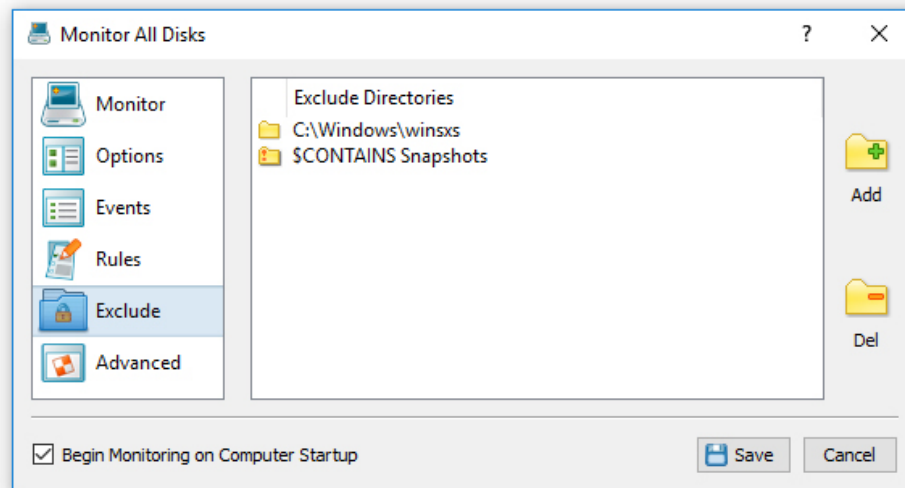

In the simplest case, just add a full directory path to exclude from the disk change monitoring process. In addition, advanced users are provided with a number of exclude directories macro commands allowing one to exclude multiple directories using a single macro command.


DiskPulse provides the following exclude directories macro commands:

- **\$BEGINS <Text String>** - this macro command excludes all changes detected in directories beginning with the specified text string.
- **\$CONTAINS <Text String>** - this macro command excludes all changes detected in directories containing the specified text string.
- **\$ENDS <Text String>** - this macro command excludes all changes detected in directories ending with the specified text string.
- **\$REGEX <Regular Expression>** - this macro command excludes all changes detected in directories matching the specified regular expression.
- **\$DIRLIST <File Name>** - this macro command allows one to exclude directories listed in a user-specified text file.


For example, the exclude macro command '\$CONTAINS Temporary Files' will exclude all changes detected in directories with 'Temporary Files' at any place in the full directory path and the exclude macro command '\$REGEX \.(TMP|TEMP)\$' will exclude changes detected in directories ending with '.TMP' or '.TEMP'.

12 Sending E-Mail Notifications

Sometimes, it may be required to send E-Mail notifications about changes in critical system directories or files. In order to enable E-Mail notifications for a disk change monitoring command, open the monitoring command dialog, select the 'Advanced' tab, enable disk change monitoring actions and specify the number of file system changes that should trigger the specified notifications actions.

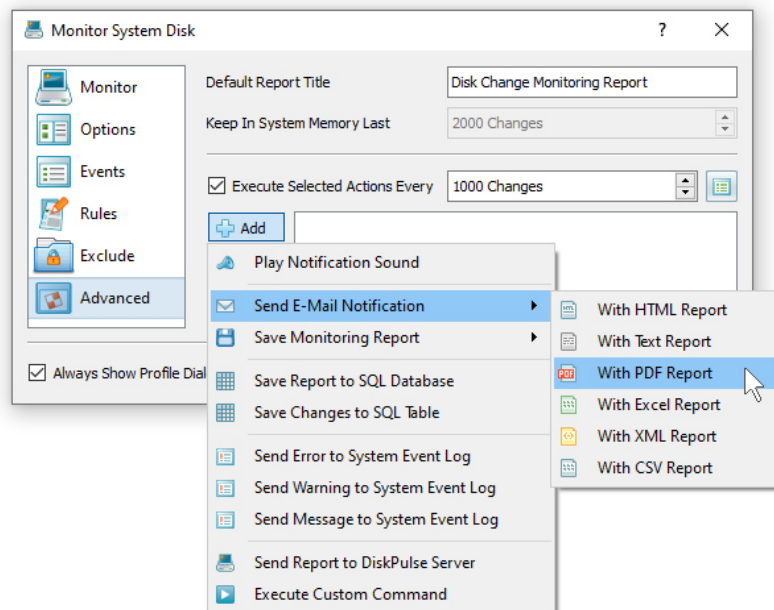


Now, press the 'Add' button and add an E-Mail notification. Every time the specified number of file system changes will be detected, DiskPulse will send an e-mail notification containing a list of detected file system changes to the specified e-mail address. After each e-mail notification, DiskPulse will clear the change list and restart the disk monitoring operation. In order to send multiple notifications to different E-Mail addresses, just add a number of notification actions with each one configured to send notifications to a different destination E-Mail address.

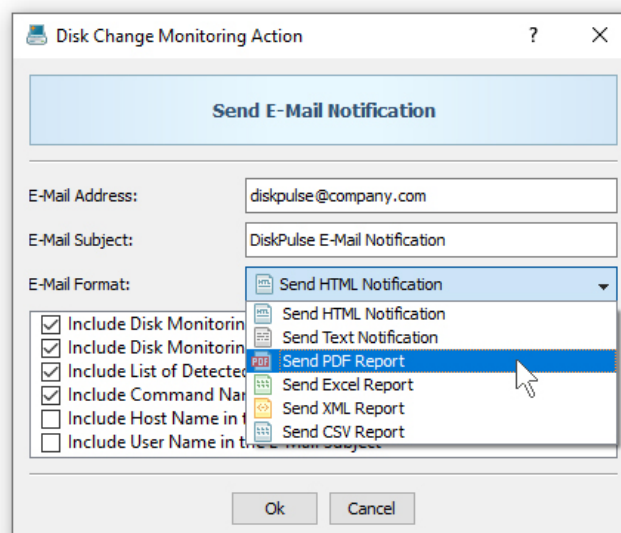


Finally, open the 'Options' dialog, select the 'E-Mail' tab, enable E-Mail notifications and specify an SMTP server and a valid e-mail account to send notifications through. Once finished configuring the SMTP server, press the 'Verify E-Mail' button to verify the specified server host name and E-Mail account.

13 Generating Reports and Executing Custom Actions

DiskPulse Server provides IT professionals and system administrators with the ability to automatically generate reports, send messages to the system event log, save reports to an SQL database and/or execute custom commands, scripts and/or batch files when a disk monitoring operation detects a user-specified number of file system changes.

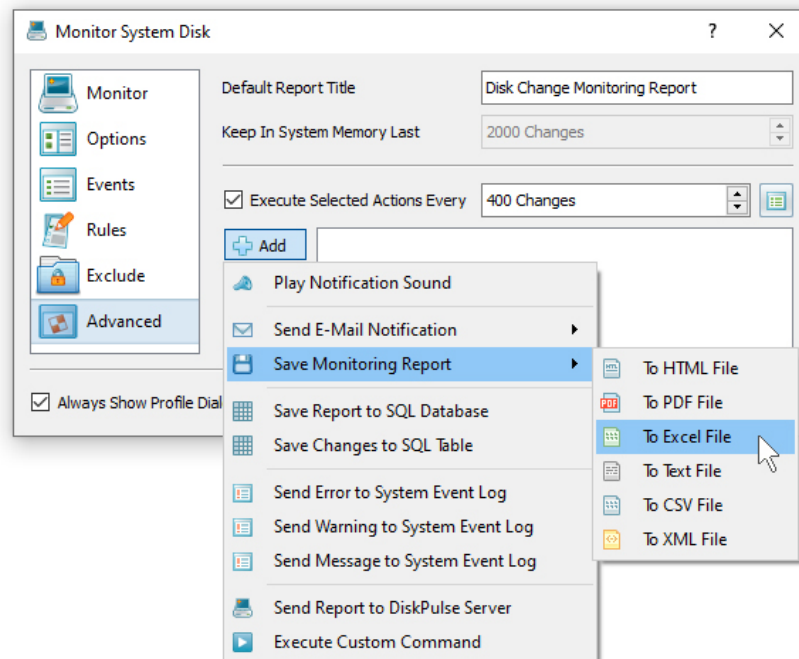


In order to configure one or more notification or report generation actions, open the disk change monitoring command dialog, select the 'Advanced' tab, enable disk monitoring actions, specify the number of changes that should trigger disk monitoring actions and add one or more actions configured to perform required operations.

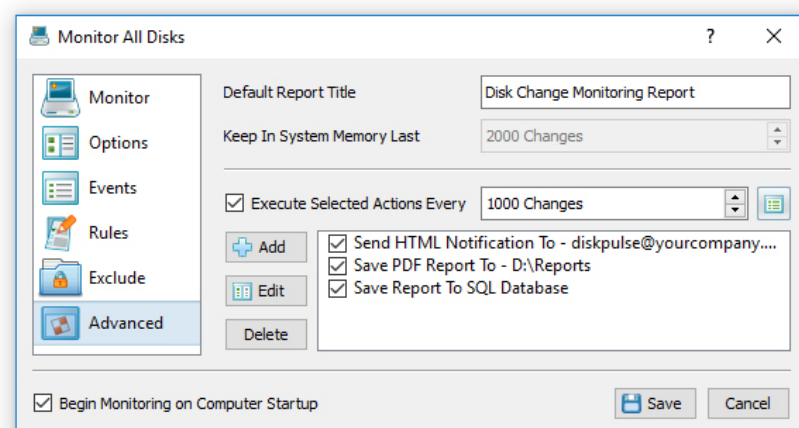


Every time the specified number of file system changes will be detected, DiskPulse will perform the specified operations. In order to allow a custom command to access the latest list of file system changes, add an automatic report generation action and specify a pre-defined report file name, which will be used by the subsequent command action to access the change list. After finishing execution of the specified disk monitoring actions, DiskPulse will clear the change list and restart the disk monitoring operation.

14 Disk Change Monitoring Reports

DiskPulse Server allows one to save disk change monitoring reports into a number of standard formats including HTML, PDF, Excel, JSON, XML, text and CSV. In the simplest case, perform a disk change monitoring operation and press the 'Save' button located on the main toolbar. On the save report dialog, select an appropriate report format, enter a report file name and press the 'Save' button.

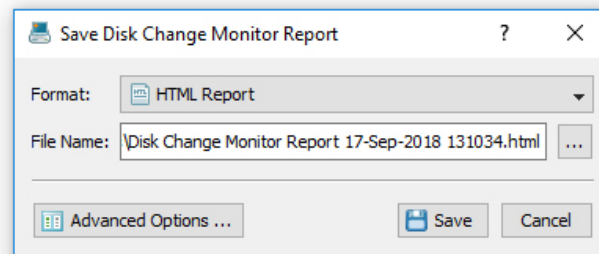


For the HTML, PDF, Excel, text, CSV, JSON and XML report formats, the user is provided with the ability to save a short summary report or a longer detailed report, which may be very long for large reports containing many thousands of changes. Short, summary disk change monitoring reports include a table showing the last 20 file system changes and a list of tables showing the number of file system changes and the total disk space per file extension, file type, top-level directory, user name, etc. By default, DiskPulse saves full disk change monitoring reports in the HTML format.

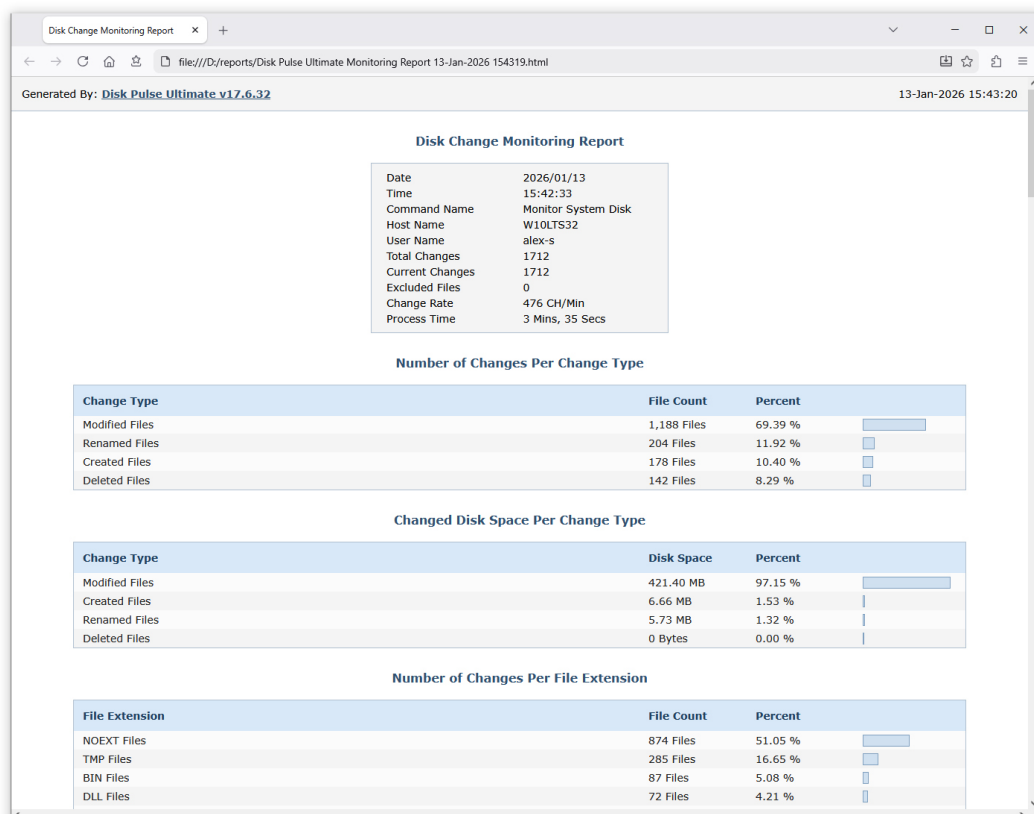


In addition, DiskPulse Server provides the ability to save disk change monitoring reports to the DiskPulse native report format, which preserves all information related to each specific disk change monitoring operation and may be loaded at any time by using the DiskPulse main GUI application.

Sometimes, it may be required to perform additional analysis of disk change monitoring results using external tools such as Microsoft Excel. In order to export disk change monitoring results to the Excel report format, perform a disk change monitoring operation, press the 'Save' button located on the main toolbar, select the 'Excel Summary' report format for a short summary report or the 'Excel Report' format for a detailed disk change monitoring report.

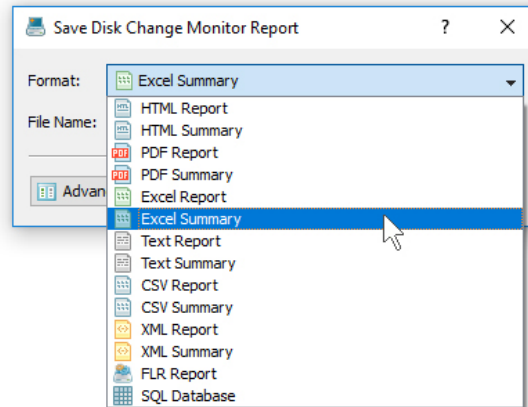

A summary Excel report will include a list of the last 20 file system changes and a number of tables showing the number of file system changes and the total disk space per file extension, file category, top-level directory name, user name, etc.

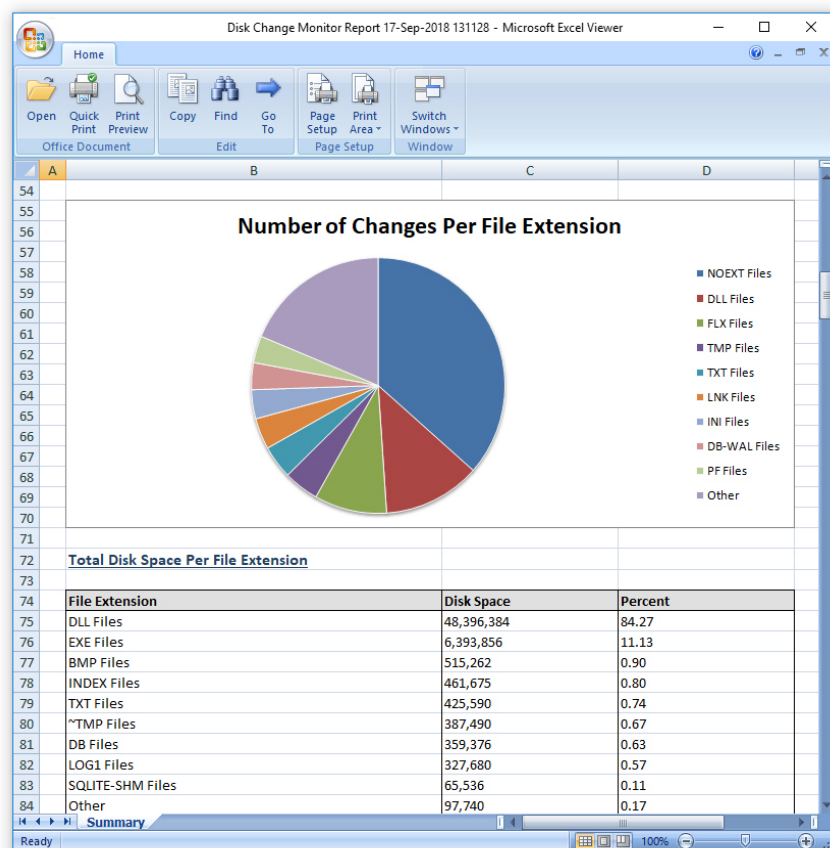

A detailed Excel report will include a list of file categories according to the currently selected file categorization mode and a full list of detected file system changes, which may be very long for large reports containing many thousands of changes. In order to control how many file system changes are exported in the detailed report, press the 'Advanced Options' button located on the 'Save Report' dialog and customize the disk monitoring report for your specific needs.


In addition to the graphical report formats, the user is provided with the ability to export the disk change monitoring reports to a number of structured file formats such as CSV, JSON and XML allowing one to analyze the disk change monitoring results using external analysis tools.

```

1 {
2   "summary": {
3     "title": "Disk Change Monitoring Report",
4     "generator": "Disk Pulse Server v17.2.26",
5     "date": "2025/09/01",
6     "time": "13:02:16",
7     "command_name": "Monitor System Disk",
8     "host_name": "WIN10NB32",
9     "os_name": "Windows 10 22H2 32-Bit",
10    "user_name": "SYSTEM",
11    "total_changes": "3538",
12    "current_changes": "3538",
13    "excluded_files": "0",
14    "change_rate": "201 CH/Min",
15    "process_time": "17 Mins, 33 Secs"
16  },
17  "changes": [
18    {
19      "date": "01-Sep-2025",
20      "time": "12:44:41",
21      "name": "C:\\Windows\\WindowsUpdate.log",
22      "type": "Modified",
23      "size": "276",
24      "owner": "SYSTEM",
25      "attributes": "32"
26    },
27    {
28      "date": "01-Sep-2025",
29      "time": "12:44:41",
30      "name": "C:\\Windows\\System32\\config\\SOFTWARE",
31      "type": "Modified",
32      "size": "51904512",
33      "owner": "Administrators",
34      "attributes": "32"
35    }
36  ]
37 }

```


One of the most powerful capabilities of DiskPulse Server and DiskPulse Enterprise product versions is the ability to export disk change monitoring results to AI-friendly file formats allowing one to easily import disk change monitoring reports to various AI platforms, perform advanced analysis operations and generate user-custom charts.

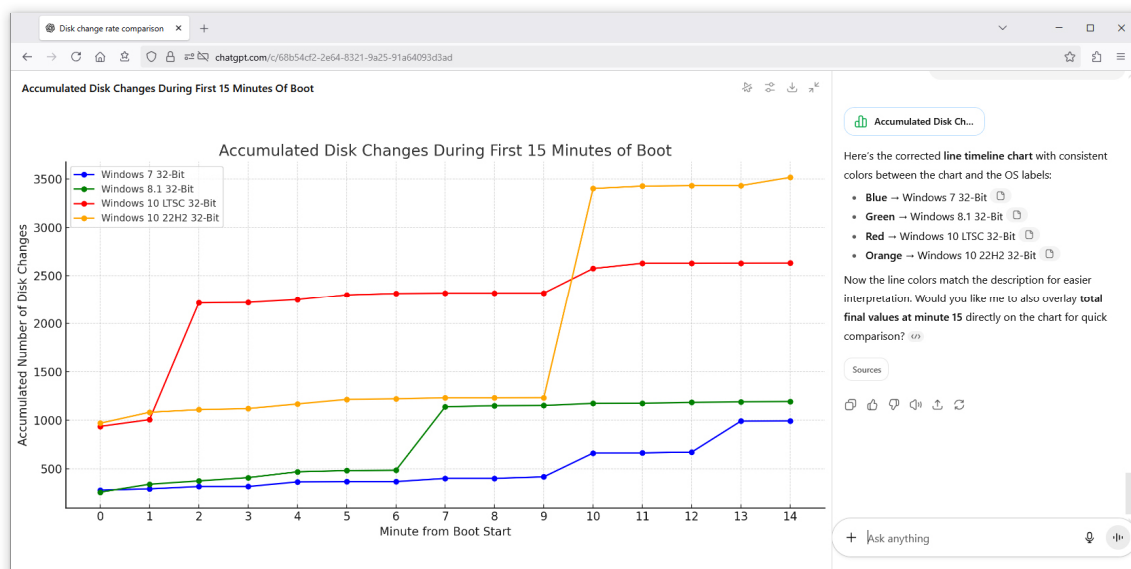


For example, in order to generate a timeline chart showing the accumulated number of disk changes per minute using the ChatGPT AI platform, export one or more disk change monitoring reports to the JSON file format, import the JSON report files to the ChatGPT AI platform and ask ChatGPT to display a timeline chart showing a timeline chart according to the uploaded JSON report files.

15 Graphical PDF Reports

One of the most useful ways to export disk change monitoring results is to use the PDF summary or the PDF report formats. Both of these report formats include various types of graphical pie charts showing the number of file system changes and the total disk space per file extension, file category, top-level directory name, user name, etc. In order to save disk change monitoring results to a PDF report file, press the 'Save' button located on the main toolbar and select the 'PDF Summary' report format for a short, summary report or the 'PDF Report' format for a detailed disk change monitoring report.

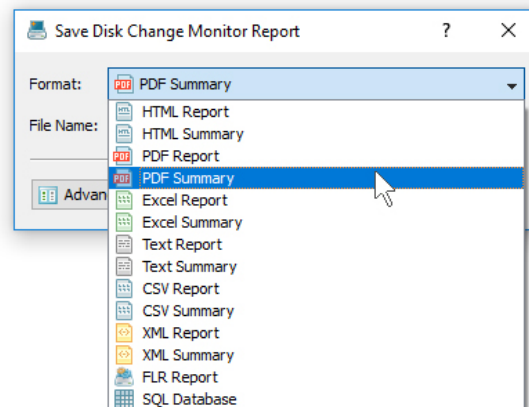


A summary PDF report will include a list of the last 20 file system changes followed by a number of pie charts showing the number of file system changes and the total disk space per file extension, file category, top-level directory name, user name, etc. A detailed PDF report will include a full list of detected file system changes, which may be very long for large reports containing many thousands of file system changes.

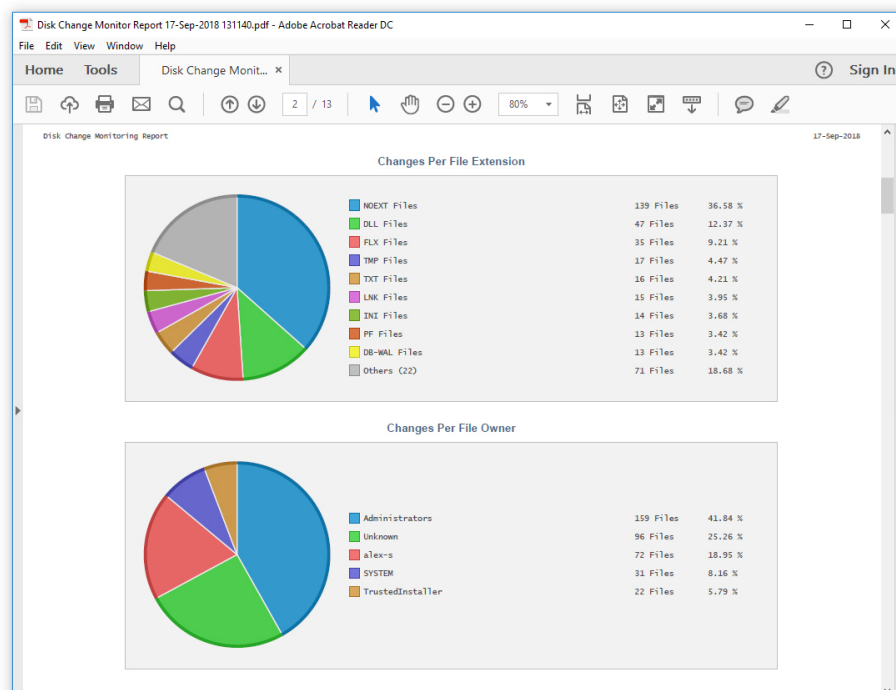


In addition to the full list of detected changes, detailed PDF reports include pie charts showing the number of file system changes and the total disk space per file category according to the currently selected file categorization mode. For example, if the second-level file categories mode is set to categorize changes by the file extension, the PDF report will display pie charts showing the number of changes per file extension.

16 Saving Reports to the DiskPulse Reports Database

DiskPulse Server includes a built-in reports database allowing one to keep a history of disk change monitoring reports, search changes in the reports database and generate summary disk change monitoring reports. In order to open the DiskPulse Server reports database, press the 'Reports' button located on the main toolbar.

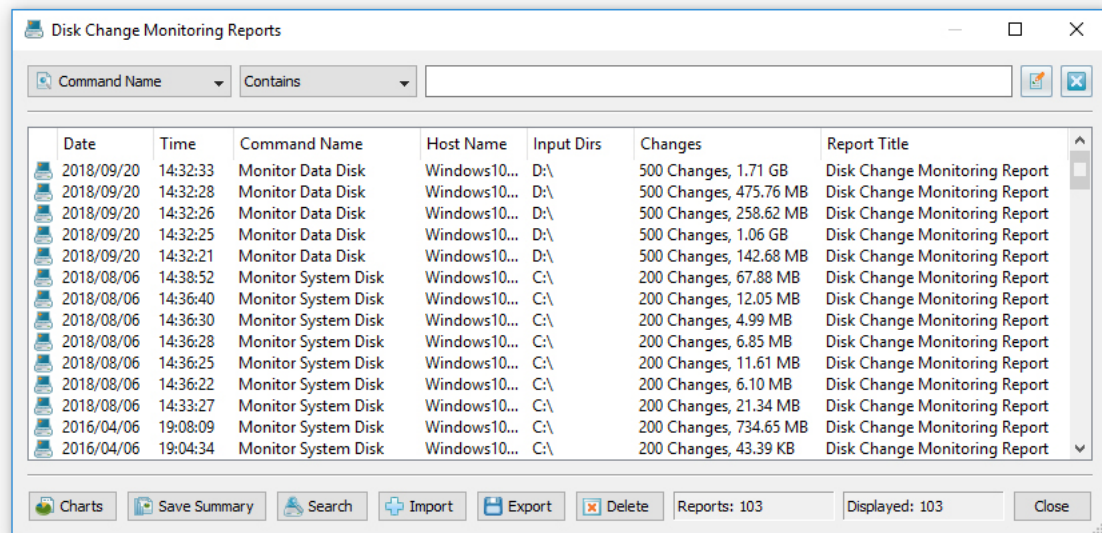


The DiskPulse reports dialog shows previously saved disk change monitoring reports and allows one to open reports, search specific file system changes in one or more disk change monitoring reports, save summary reports, export and import reports, delete reports, etc. In addition, the reports dialog provides the ability to filter reports by the disk change monitoring command name, monitored directories, report title and server host name.

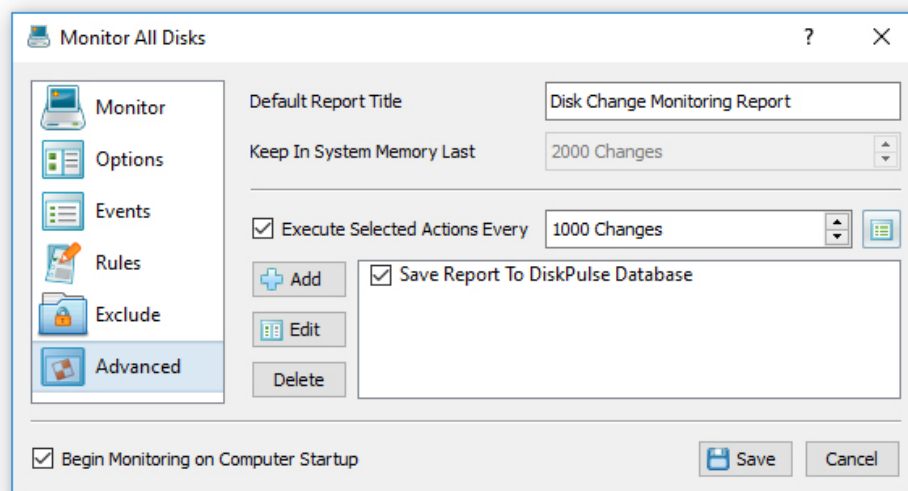


In order to automatically save disk change monitoring reports to the reports database, open the disk change monitoring command dialog, select the 'Advanced' tab, enable automated disk change monitoring actions and add an action to save a report to the DiskPulse reports database after every X changes. In addition, the user is provided with the ability to save disk change monitoring reports based on the disk change rate or after a user-specified period of time. In order to configure advanced disk change monitor actions trigger options, press the 'Actions Trigger Options' button.

17 Displaying Statistical Charts for Series of Reports

Disk change monitoring reports saved in the reports database may be searched, analyzed and exported to a number of standard formats such as HTML, PDF, Excel, text, JSON, CSV and XML. In addition, the user is provided with the ability to analyze series of disk change monitoring reports and display pie charts or bars charts showing the number of changes per file extension, change type, user name or file category.

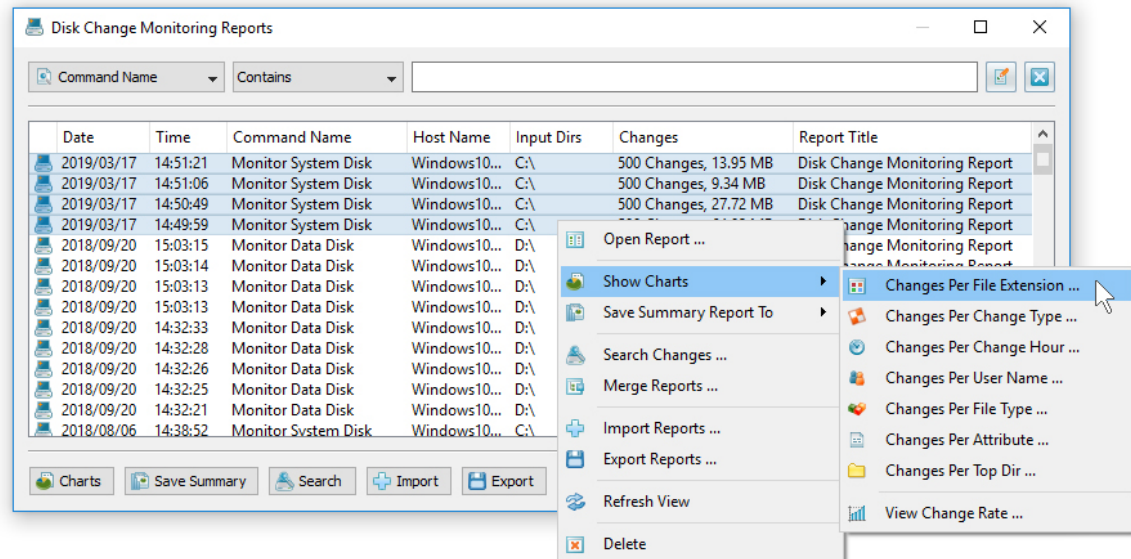


For example, in order to display a pie chart showing the number of changes per file extension in a number of disk change monitoring reports, open the 'Reports' dialog, select all the required disk change monitoring reports, press the right mouse button and select the 'Show Charts - Changes Per File Extension' menu item.

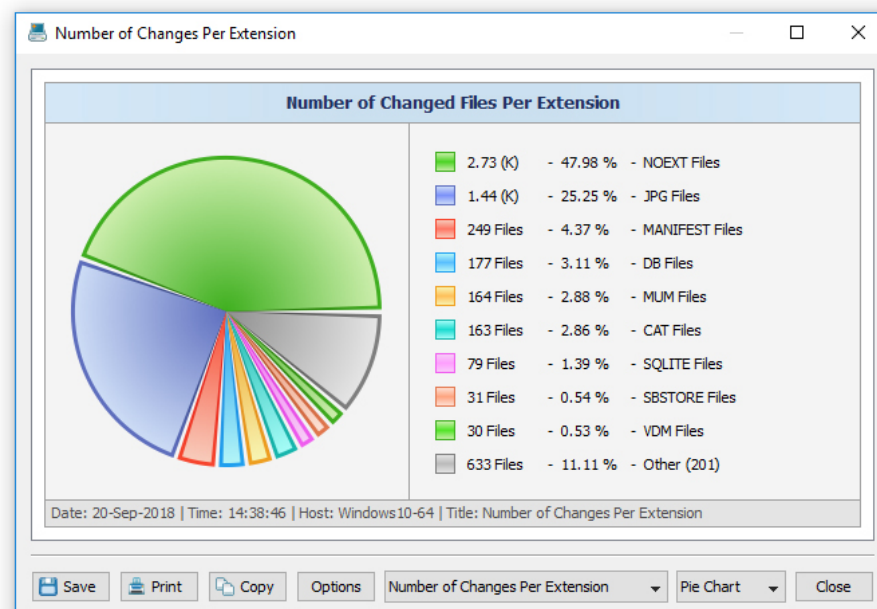


DiskPulse Server will analyze all the selected disk change monitoring reports and display a consolidated pie chart showing the number of file system changes per file extension. The charts dialog allows one to copy the chart image to the clipboard, print the chart image and edit various chart options. In the same way, the user can display pie charts or bars charts showing the number of changes per file category, user name and change type.

Another option is to display timeline charts showing the number of disk changes and the amount of changed disk space per change hour. For example, open the reports dialog, select a number of disk change monitoring reports, press the right mouse button and select the 'Show Charts - Changes Per Change Hour' menu item.

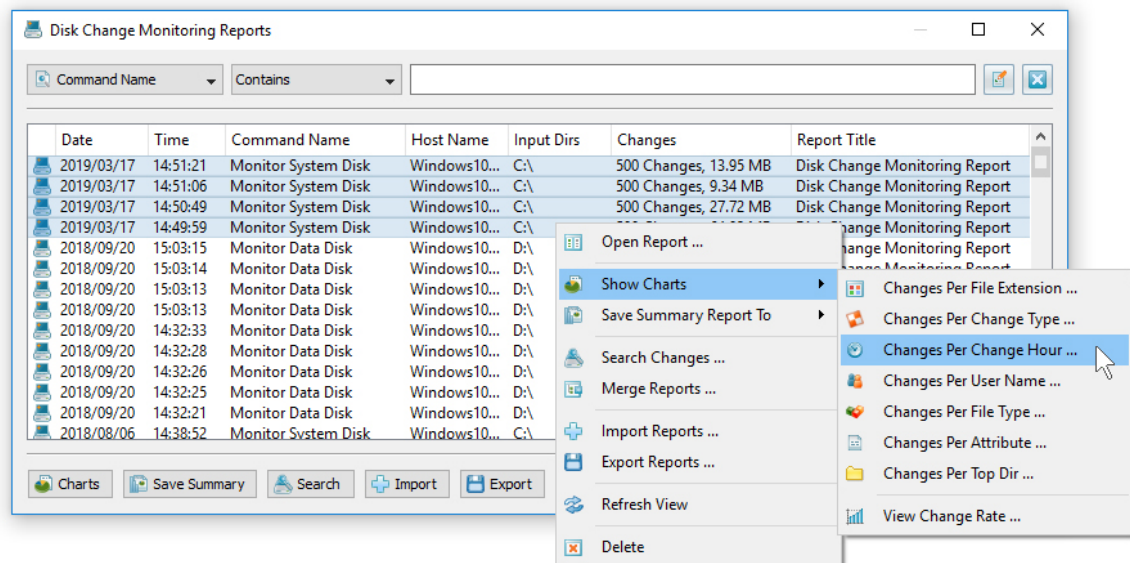


DiskPulse will scan the selected disk change monitoring reports and display a chart dialog showing a 24-hours timeline showing the number of disk changes per hour. In order to display the amount of changed disk space, set the chart mode combo box to 'Changed Disk Space Per Change Hour'.

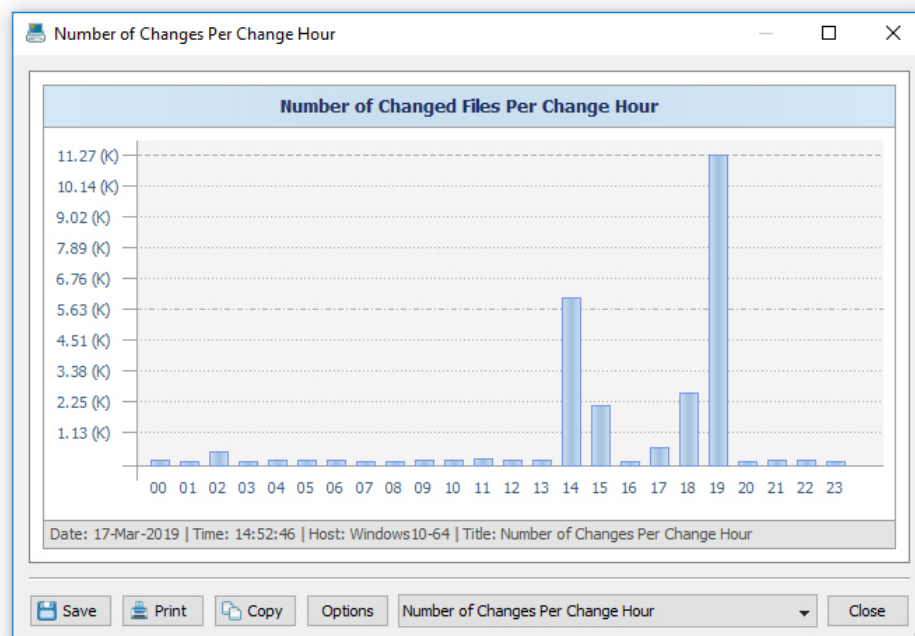


In addition, the timeline chart dialog provides the ability to export the chart data to a number of different formats, export the chart image to the BMP, JPEG and PNG image files and copy the displayed chart image to the clipboard allowing one to easily integrate DiskPulse charts into user's documents and presentations. In order to customize the chart's description, press the 'Options' button and specify a custom chart title, host name, date or time.

18 Saving Summary Disk Change Monitoring Reports

DiskPulse Server provides the ability to save a number of disk change monitoring reports to a consolidated graphical PDF summary report including various types of pie charts and disk change monitoring statistics. In order to save a summary report, press the 'Reports' dialog located on the main toolbar, select one or more disk change monitoring reports, press the right mouse button and select the 'Save Summary Report' menu item.

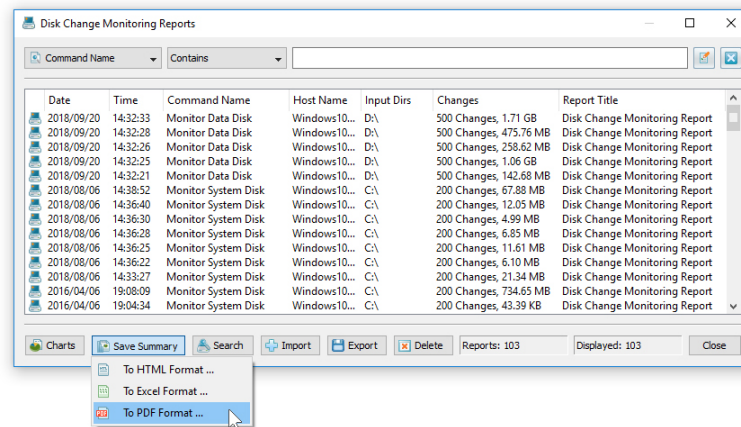


DiskPulse saves summary reports as graphical PDF reports including general information about each disk change monitoring report, a pie chart showing the number of changes per file extension, a pie chart showing the number of changes per file owner and a pie chart showing the number of changes per change type.

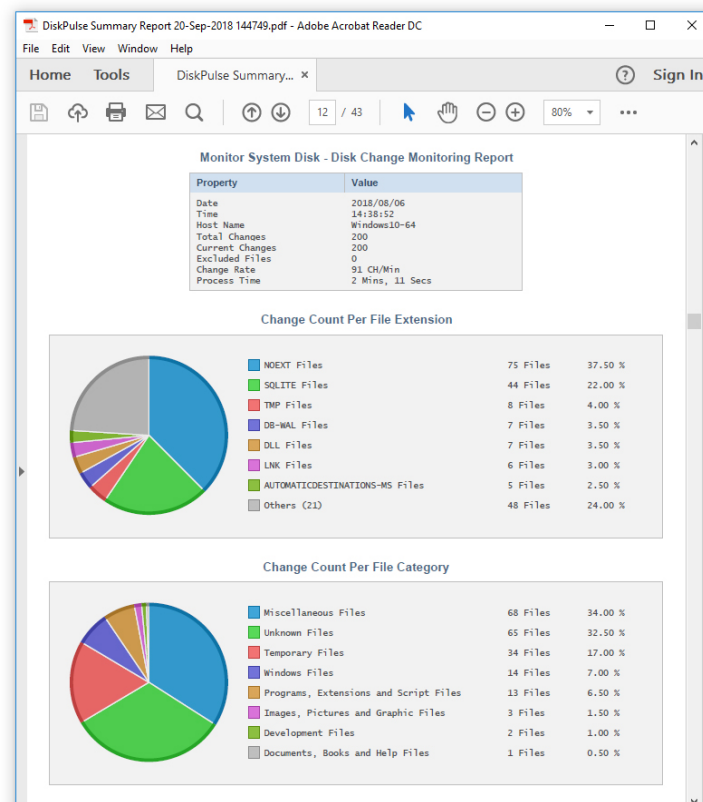


In addition, DiskPulse Enterprise provides the ability to collect disk change monitoring reports from multiple production servers to a centralized reports database and then generate summary reports containing information about all monitored servers.

19 Exporting Changes to an SQL Database

DiskPulse Server provides the ability to export detected file system changes to an SQL database via the ODBC database interface. In order to be able to export file system changes to an SQL database, the user need to configure the ODBC database interface on the main options dialog.

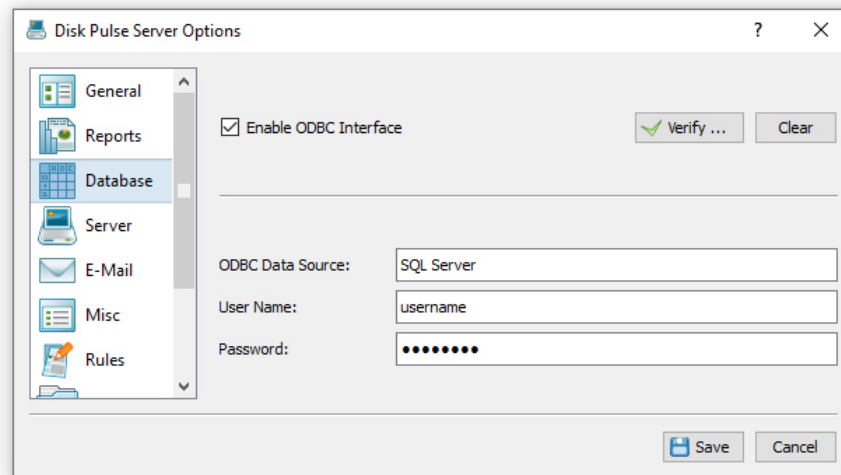


In order to configure the ODBC interface, open the main options dialog, select the 'Database' tab, enable the ODBC database interface, enter the ODBC data source name, the ODBC user name and password to use to connect to the SQL database and then press the 'Verify' button to check the specified ODBC interface.

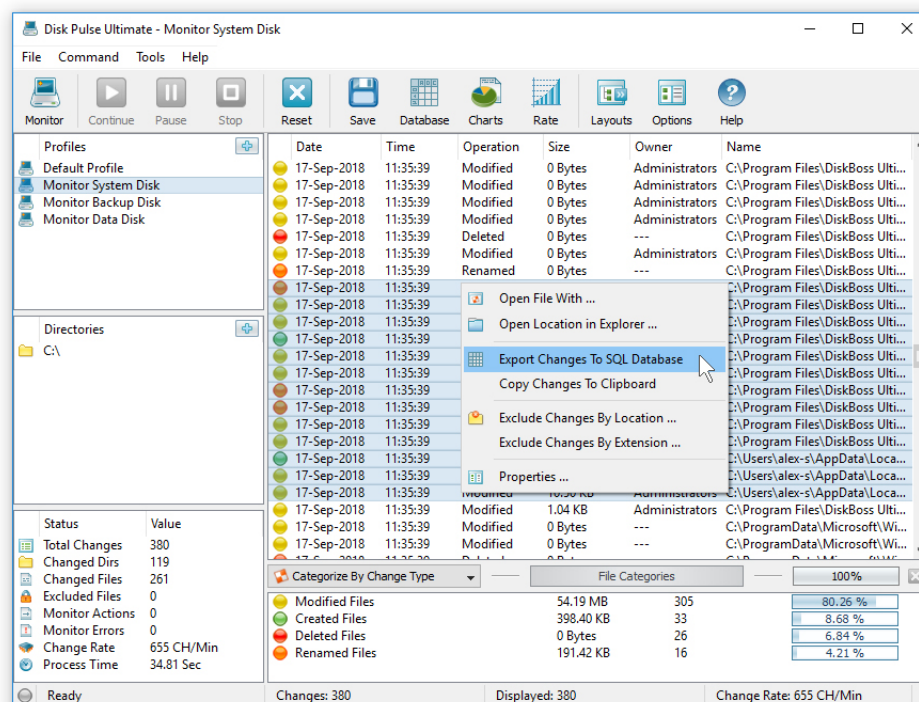

Once finished configuring the ODBC database interface, select one or more detected file system changes, press the right mouse button, select the 'Export Changes to SQL Database' menu item and enter the name of the SQL database table to export changes to. DiskPulse will connect to the specified SQL database and export the selected file system changes to the specified SQL database table.

In order to import file system changes from an SQL database to Microsoft Excel, select the menu 'Data - Import External Data - New Database Query' menu item, select the ODBC data source to import the data from, select the SQL database table name that was specified during the export operation, select SQL database table columns to be imported, optionally select the data sorting mode and press the 'Finish' button.

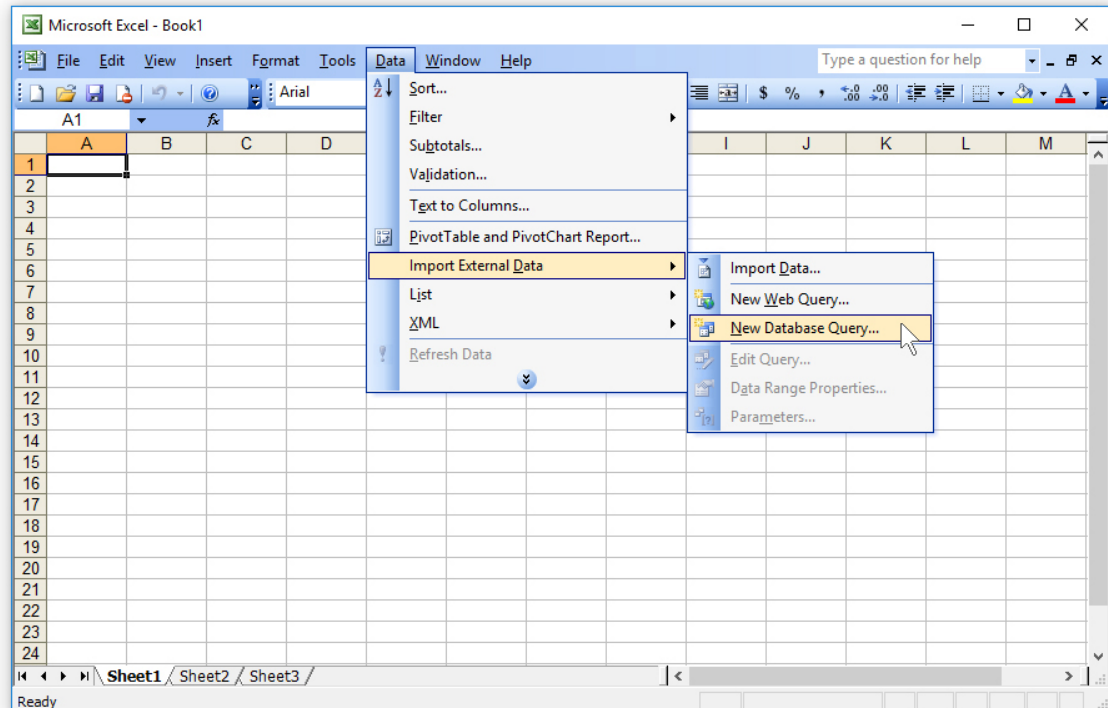


For each detected file system change, DiskPulse exports to the SQL database the following columns of data: a unique change ID, the date and time of the change, the type of the change (created, modified, renamed or deleted), the size of the file as recorded at the time of the change, the user name of the file owner and the full file or directory name.

The screenshot shows the Microsoft Excel interface with a table of file system changes. The table has six columns: 'id', 'dt', 'ctype', 'fsize', 'owner', and 'name'. The data is as follows:


id	dt	ctype	fsize	owner	name
1	17-Sep-2018 11:35:39	Modified	0 Bytes	Administrators	C:\Program Files\DiskBoss Ultimate\bin
2	17-Sep-2018 11:35:39	Renamed	0 Bytes	---	C:\Program Files\DiskBoss Ultimate\bin\diskboss.flx
3	17-Sep-2018 11:35:39	Renamed To	1.17 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskboss_old.flx
4	17-Sep-2018 11:35:39	Modified	0 Bytes	Administrators	C:\Program Files\DiskBoss Ultimate\bin
5	17-Sep-2018 11:35:39	Modified	1.17 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskboss_old.flx
6	17-Sep-2018 11:35:39	Created	0 Bytes	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskbossult.flx
7	17-Sep-2018 11:35:39	Modified	0 Bytes	Administrators	C:\Program Files\DiskBoss Ultimate\bin
8	17-Sep-2018 11:35:39	Modified	1.04 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskbossult.flx
9	17-Sep-2018 11:35:39	Renamed	0 Bytes	---	C:\Program Files\DiskBoss Ultimate\bin\diskbossult.flx
10	17-Sep-2018 11:35:39	Renamed To	1.04 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskboss.flx
11	17-Sep-2018 11:35:39	Modified	0 Bytes	Administrators	C:\Program Files\DiskBoss Ultimate\bin
12	17-Sep-2018 11:35:39	Modified	1.04 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskboss.flx
13	17-Sep-2018 11:35:39	Created	0 Bytes	Administrators	C:\Users\alex-s\AppData\Local\Temp\insp13AE.tmp\AccessControl.dll
14	17-Sep-2018 11:35:39	Modified	0 Bytes	Administrators	C:\Users\alex-s\AppData\Local\Temp\insp13AE.tmp
15	17-Sep-2018 11:35:39	Modified	10.50 KB	Administrators	C:\Users\alex-s\AppData\Local\Temp\insp13AE.tmp\AccessControl.dll
16	17-Sep-2018 11:35:39	Modified	1.04 KB	Administrators	C:\Program Files\DiskBoss Ultimate\bin\diskboss.flx

20 Saving Reports to an SQL Database


DiskPulse allows one to save disk change monitoring reports in an SQL database. In order to enable SQL database reports, open the main options dialog and select the 'Database' tab. On the SQL database configuration tab enter the ODBC data source, user name and password to use to save reports to the SQL database.

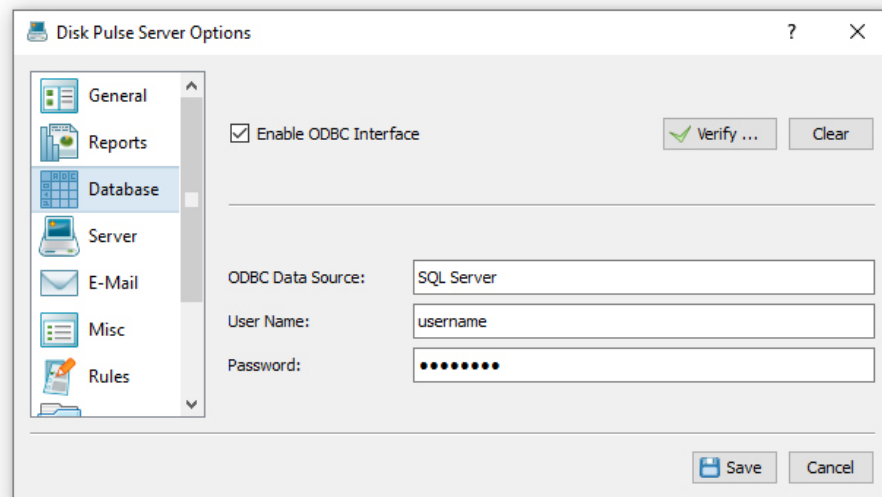


Now, open the disk monitoring command dialog, select the 'Advanced' tab, enable disk change monitoring actions, press the 'Add Action' button and select the 'Save Report to SQL Database' action type. During the disk change monitoring process, DiskPulse server will save every X detected file system changes to the specified SQL database according to the configuration set on the advanced monitoring options dialog.

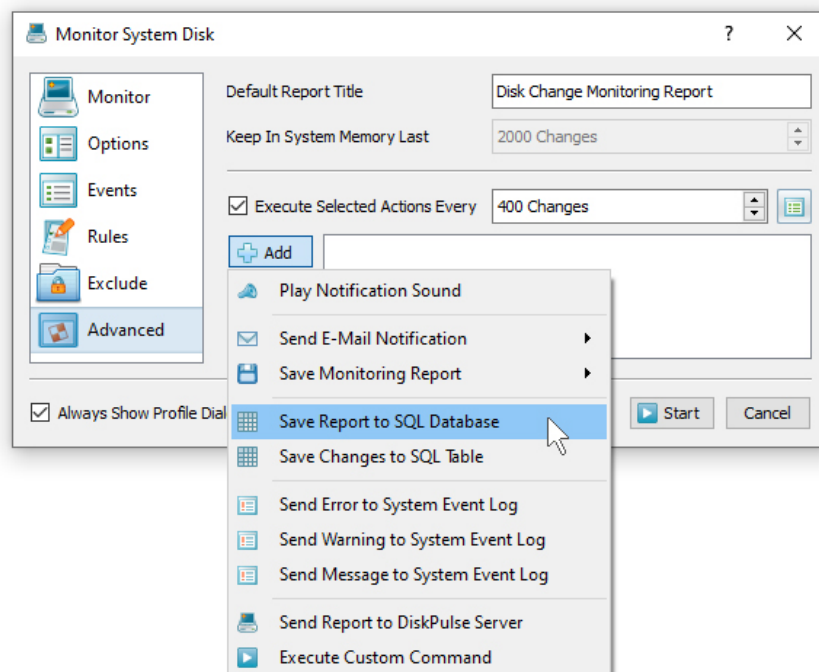

With an enabled and properly configured SQL database, all reports saved in the SQL database will be displayed on the database reports dialog. In order to open the database reports dialog, press the 'Database' button located on the main toolbar. For each disk change monitoring report, the reports page shows the report date and time, the name of the disk change monitoring command generated the report and the number of file system changes saved in each specific report.

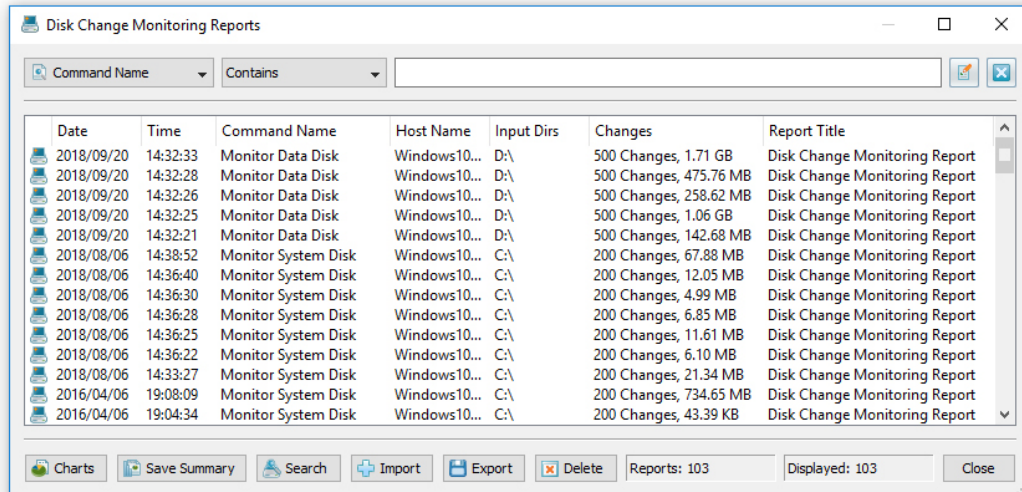


In order to open a previously saved disk change monitoring report, just click on the report item displayed on the database reports dialog. For each detected file system change, the disk change monitoring results dialog shows the date and time of the change, the type of the change operation (created, modified, deleted, etc.), the size of the file as recorded at the time of the change, the owner of the changed file or directory and the name of the changed file or directory.

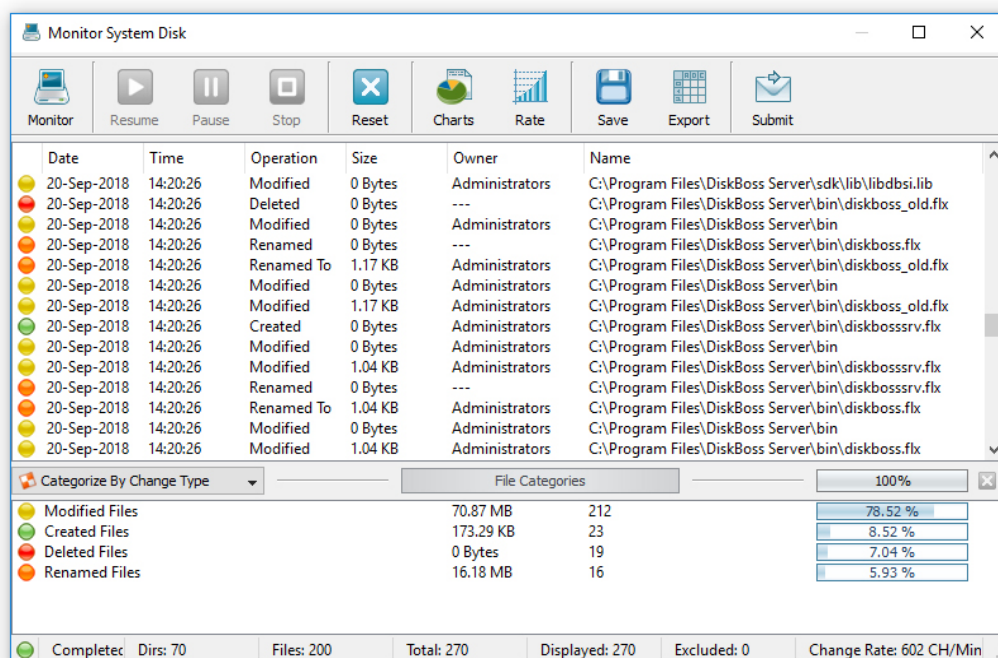

DiskPulse Server provides the ability to export previously saved disk change monitoring reports to a number of the standard report formats including HTML, text, Excel, CSV, XML, PDF and the DiskPulse native report format. In order to export a previously saved disk change monitoring report, press the 'Save' button located on the monitoring results dialog and select an appropriate report format.

21 Automatic Report Management

DiskPulse allows one to keep a user-specified number of reports in the reports directory or the reports SQL database while automatically deleting old reports and freeing up the disk space. These features are especially useful for fully automated disk change monitoring configurations when the user needs to keep a history of report files in a reports directory or a history of disk change monitoring reports in an SQL database.

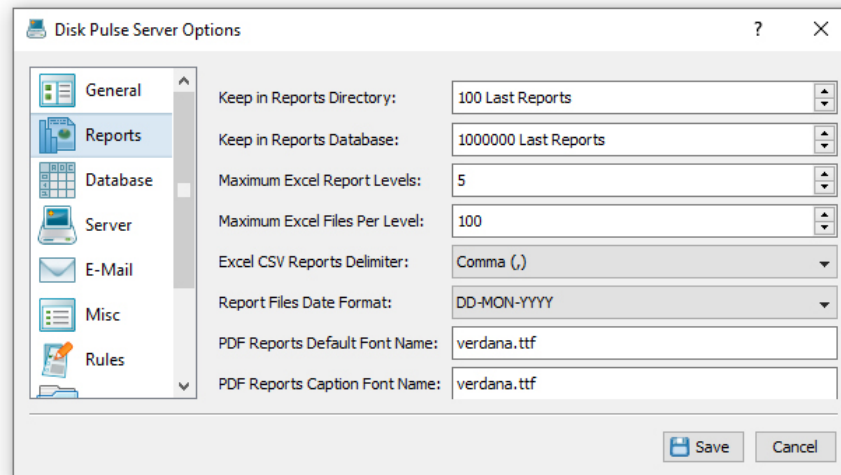

By default, DiskPulse keeps all reports in the reports directory or the SQL database. In order to enable automatic report management, open the 'Options' dialog, select the 'Reports' tab and change the 'Report Files' or 'Report Database' options to appropriate values.

The '**Keep in Reports Directory**' option is applicable to HTML, text, Excel CSV, XML and DiskPulse native reports saved to a reports directory or to the user's home directory using automated report generation actions. After saving each new report, DiskPulse will check if there are too many reports of the same type (HTML, XML, CSV, etc.) in the reports directory and delete old reports according to the user-specified configuration.

The '**Keep in SQL Database**' option is applicable to disk change monitoring reports submitted to an SQL database using the DiskPulse GUI application, the DiskPulse command line utility or the DiskPulse server. After saving each new report to the database, DiskPulse will check if there are too many reports from the same host computer, monitoring the same set of disks or directories and delete old reports according to the user-specified configuration. For example, if two servers are submitting reports to the same SQL database, DiskPulse will keep in the database X last reports for each server.


DiskPulse Enterprise, which is capable of receiving and analyzing reports received from multiple servers or desktop computers, manages reports in the database according to the same configuration options. For each server and each set of monitored disks or directories, DiskPulse Enterprise keeps a history of X last disk change monitoring reports according to the user-specified configuration.

The '**Save File Categories**' option allows one to enable/disable exporting of file categories to HTML, text, Excel CSV and XML reports. Second-level file categories are available when reports are saved using the DiskPulse GUI application manually. Automatically generated reports or reports saved using the DiskPulse command line utility always saved without file categories. When the 'File Categories' option is enabled, DiskPulse GUI application will save second-level file categories to HTML, Excel, text, JSON, CSV and XML reports.

The '**Save Compressed Report Files**' option allows one to save automatically generated HTML, text, JSON, CSV and XML reports as compressed archive files.

22 Disk Change Monitoring Wizard


DiskPulse Server provides a disk change monitoring wizard allowing one to automatically setup frequently used disk change monitoring operations. Press the 'Wizard' button located on the main toolbar and then select an appropriate wizard type to create a disk change monitoring operation pre-configured for specific needs.

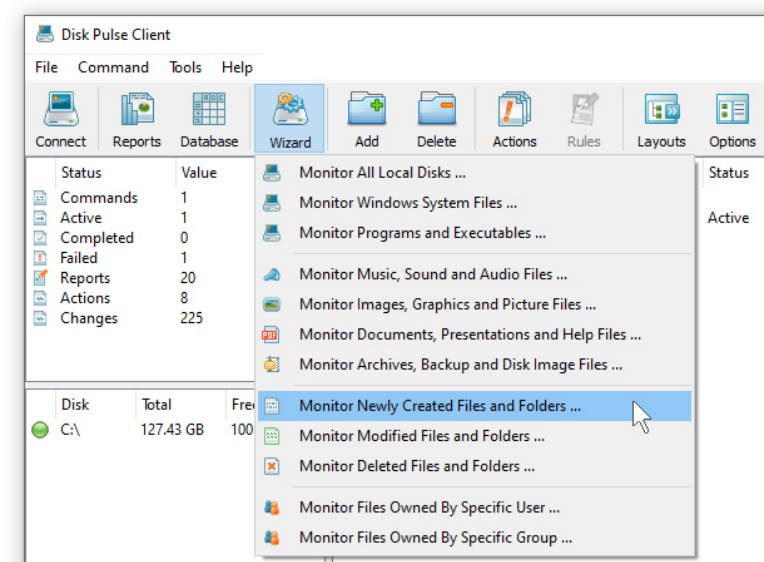


- **Monitor All Local Disks** - this wizard creates a simple disk change monitoring command configured to monitor all types of changes in all local disk drives.
- **Monitor Windows System Files** - this wizard creates a disk change monitoring command configured to monitor the Windows directory and detect changes made in any system files.
- **Monitor Programs and Executables** - this wizard creates a disk change monitoring command configured to monitor changes in all programs, DLL files and scripts located in the Windows directory and the Program Files directory.
- **Monitor Music, Sound and Audio Files** - this wizard creates a disk change monitoring command configured to monitor changes in all types of music and audio files stored in all local disk drives.
- **Monitor Images, Graphics and Picture Files** - this wizard creates a disk change monitoring command configured to monitor changes in all types of image and graphics files stored in all local disk drives.
- **Monitor Documents, Presentations and Help Files** - this wizard creates a disk change monitoring command configured to monitor changes in all types of documents and text files stored in all local disk drives.
- **Monitor Archives, Backup and Disk Image Files** - this wizard creates a disk change monitoring command configured to monitor changes in all types of archives and backup files stored in all local disk drives.
- **Monitor Newly Created Files and Folders** - this wizard creates a disk change monitoring command configured to monitor newly created (not modified) files and folders in all local disk drives.
- **Monitor Modified Files and Folders** - this wizard creates a disk change monitoring command configured to monitor modified (not newly created) files and folders in all local disk drives.
- **Monitor Deleted Files and Folders** - this wizard creates a disk change monitoring command configured to monitor deleted files and folders in all local disk drives.
- **Monitor Files Owned By Specific User** - this wizard creates a disk change monitoring command configured to monitor files and folders owned by a specified user in all local disk drives.
- **Monitor Files Owned By Specific Group** - this wizard creates a disk change monitoring command configured to monitor files and folders owned by a specified group in all local disk drives.

23 Managing File Classification Plug-ins

DiskPulse Server allows one to monitor changed files by the file type using the 'Default File Classification Plug-in', which is capable of recognizing more than 3,500 of the standard file types and formats. In addition, a number of advanced file classification plug-ins are available for registered users of DiskPulse Server.

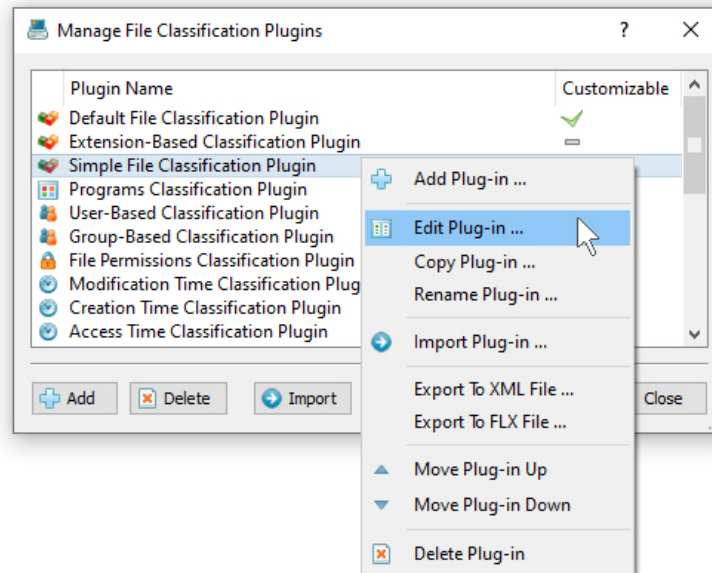


Finally, DiskPulse Server provides the ability to add user-custom file classification plug-ins and customize the built-in file classification plug-ins allowing one to search duplicate files according to the user-specific needs and requirements. In order to add a custom file classification plug-in, select the menu 'Tools - Manage Plug-ins', press the 'Add' button, specify a unique file classification plug-in name and then use the file classification plug-in designer dialog to create your custom file categories and file classes.

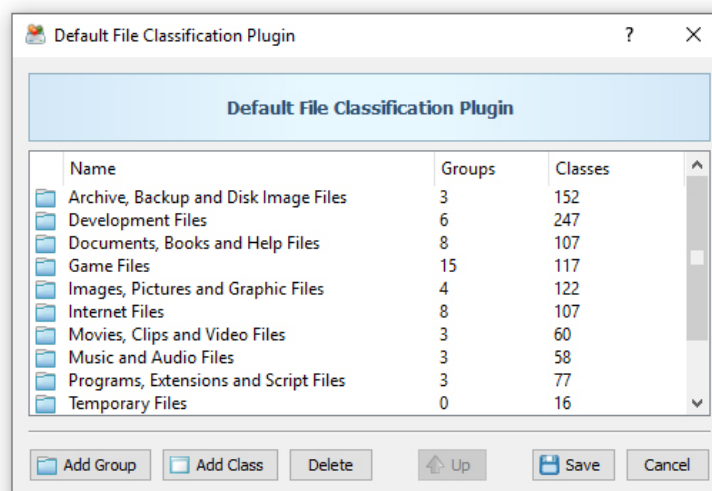


Another option is to customize a built-in file classification plug-in by adding support for one or more additional file type or file categories. In order to customize a built-in file classification plug-in, select the menu 'Tools - Manage Plug-ins', select the required file classification plug-in item, click the right mouse button and select the 'Copy Plug-in' menu, specify a new plug-in name and then double click on the newly copied plug-in item to open the plug-in copy in the file classification plug-ins designer dialog.

24 Using DiskPulse Enterprise

The DiskPulse Enterprise product version can be used as a centralized reports database server capable of receiving disk change monitoring reports from multiple production servers. DiskPulse Enterprise allows one to define a centralized set of report analysis rules, which are automatically applied to disk change monitoring reports received from production servers, detect critical file system changes and send E-Mail notifications.

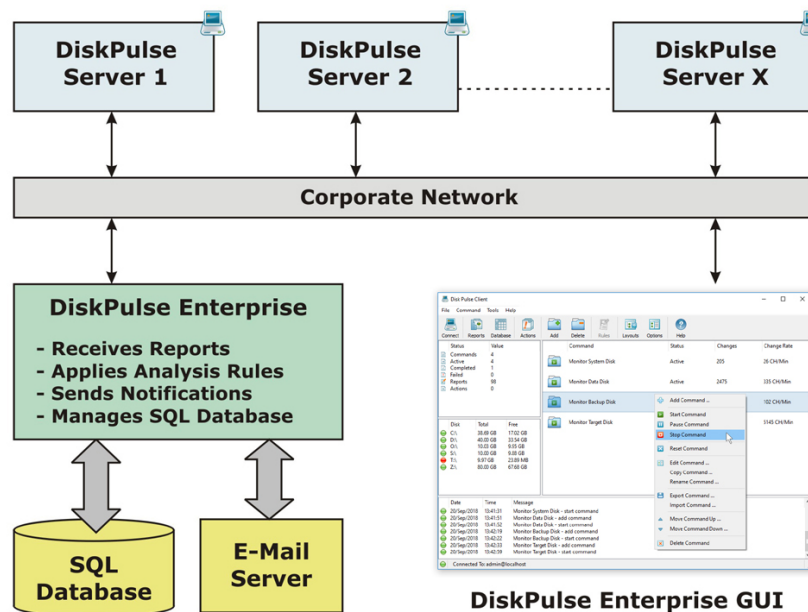


DiskPulse Enterprise runs in the background as a service and uses a built-in reports database to store disk change monitoring reports received from production servers. The user is provided with a client GUI application, which connects to DiskPulse Enterprise through the network and allows one to review received reports, configure report analysis rules and manage the reports database.

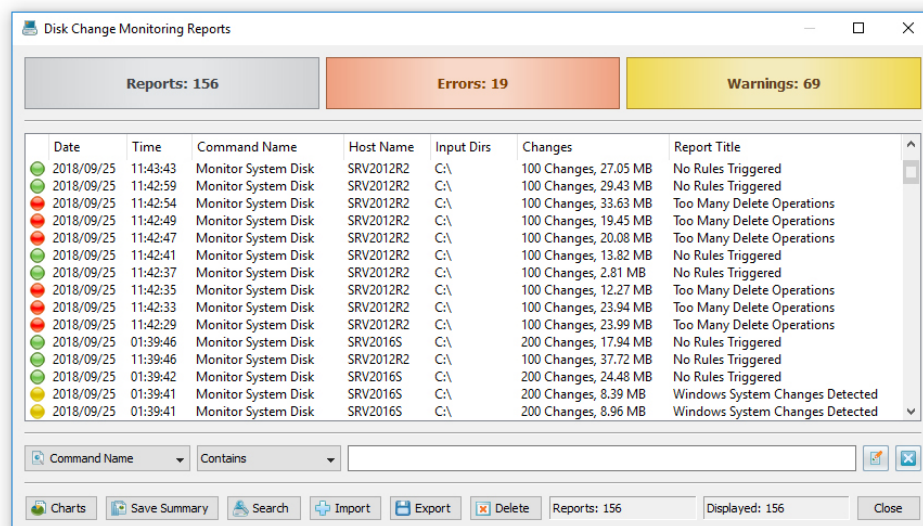


DiskPulse Enterprise allows one to collect disk change monitoring reports from a number of servers, analyze reports according to one or more user-specified rules, search specific changes in the entire database of disk change monitoring reports and send E-Mail notifications when critical changes are detected in one or more reports.

In order to define one or more analysis rules, press the 'Rules' button located on the main tool bar in the DiskPulse client GUI application. On the 'Analysis Rules' dialog, press the 'Add' button, specify the rule description, select the type of the action to perform and enter an E-Mail address to send notifications to.

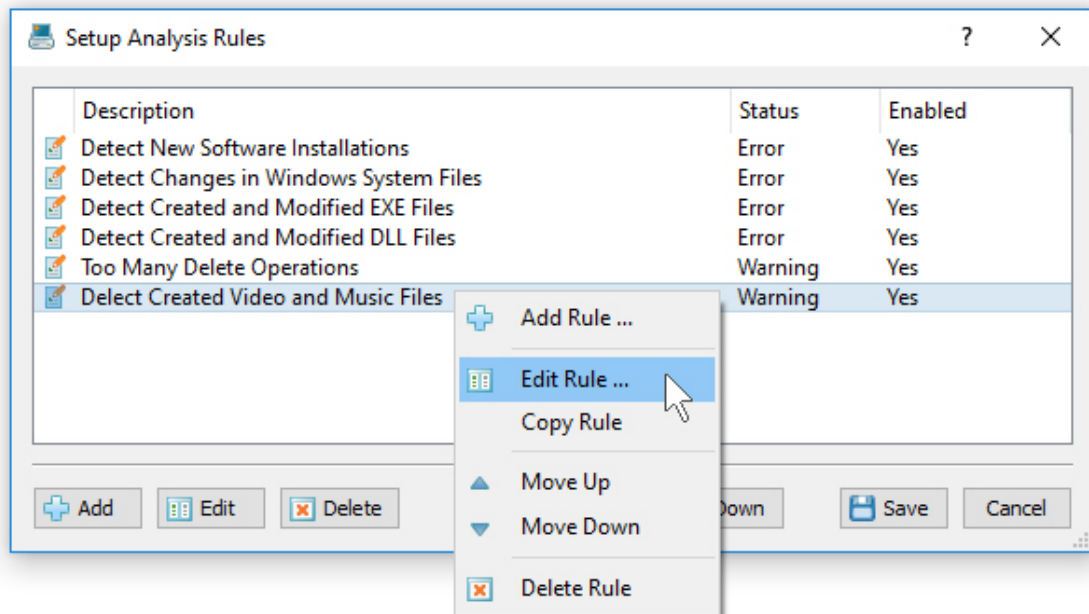


Optionally, select the 'Rules' tab and add one or more file matching rules specifying file types the rule should be applied to. Finally, the 'Advanced' tab allows one to control the following advanced options: hosts the rule should be applied to (all or a specific host), report titles the rule should be applied to and change types the rule should be applied to (all or a specific change type).

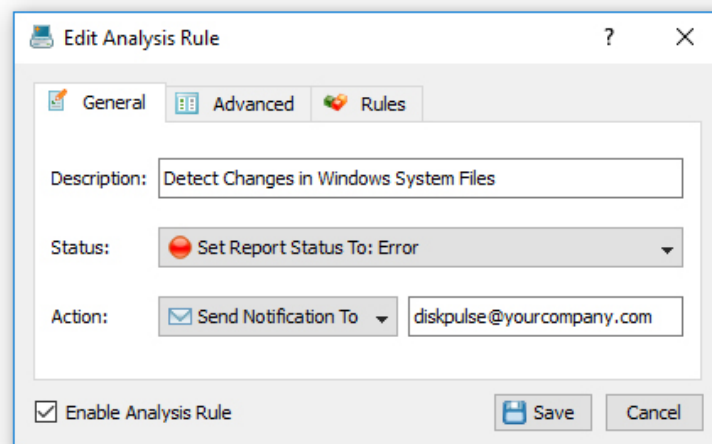


The specified report analysis rules are applied to incoming disk change monitoring reports in the same order as specified in the 'Rules' dialog. In order to change the order of a rule, select the rule and press the 'Up' or 'Down' buttons. The simplest way to submit a disk change monitoring report to DiskPulse Enterprise is to use the regular DiskPulse Server GUI application. In order to submit a disk change monitoring report, open a disk change monitoring report and press the 'Submit' button.

On the 'Submit' dialog specify the host name or the IP address of the DiskPulse Enterprise and press the 'Ok' button. By default, the DiskPulse Enterprise uses the TCP/IP port 9120 to receive reports from production servers, but the port number may be changed to any custom port number according to user-specific needs. In order to specify a user-custom port number when submitting reports to the DiskPulse Enterprise use the following format: hostname:port.

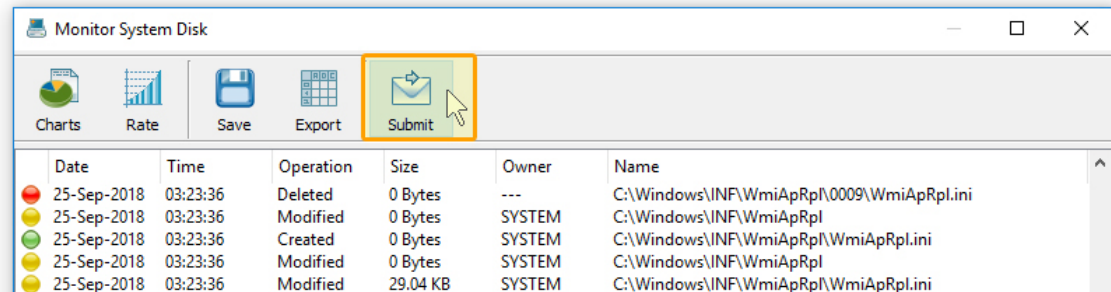


Manual submission of disk change monitoring reports to the DiskPulse Enterprise is good for testing purposes, but if you need to automatically collect disk change monitoring reports from a number of production servers to a central DiskPulse database server, you need to configure automatic report submission actions.

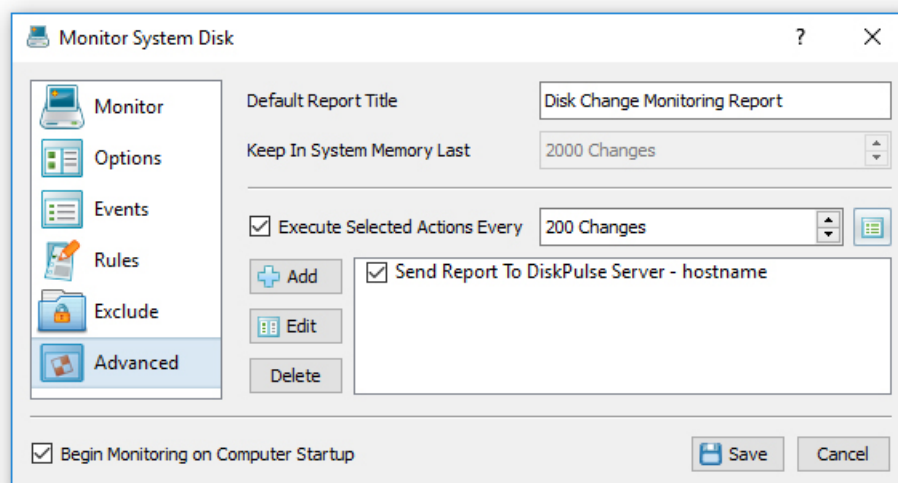


In order to configure DiskPulse servers (running on production servers) to automatically submit disk change monitoring reports to the DiskPulse database server, open the disk change monitoring command (on each production server), select the 'Advanced' tab, enable execution of automatic disk monitoring actions, specify the number of changes to trigger the actions and add a disk monitoring action configured to send reports to a DiskPulse Enterprise.

25 Disk Change Monitoring History Statistics

DiskPulse Enterprise allows one to display history statistics pie charts showing the number of changes per file extension, the number of changes per change type and the number of changes per user name.

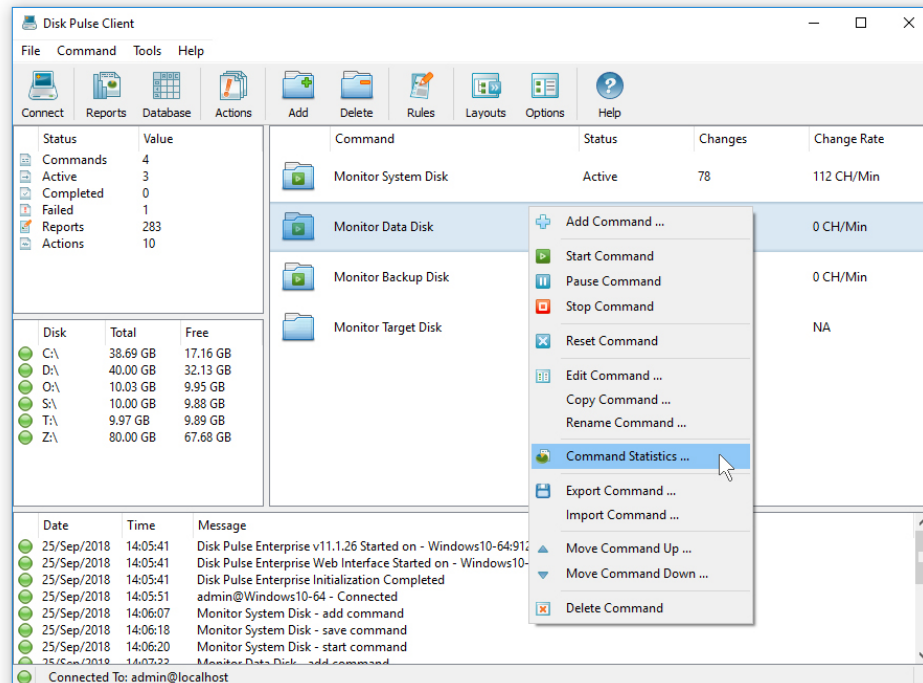


In order to open the disk change monitoring statistics dialog, start the DiskPulse client GUI application, select a disk change monitoring command, press the right mouse button and select the 'Command Statistics' menu item.

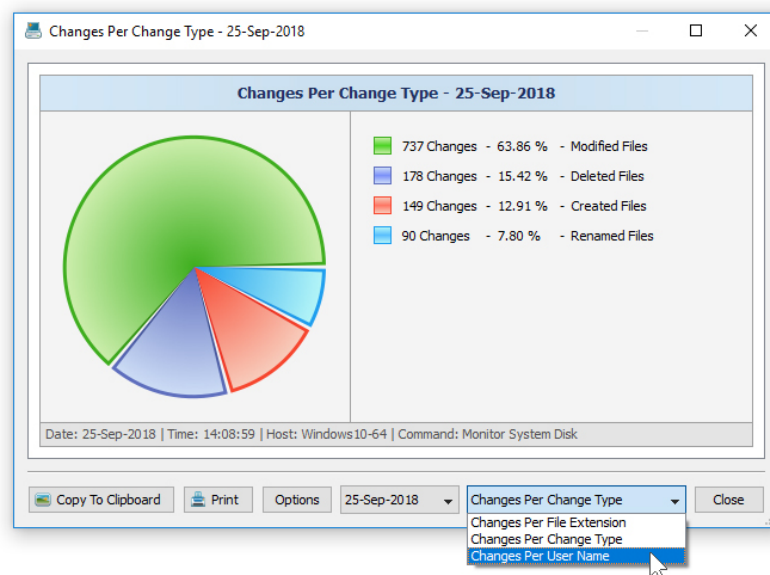

By default, DiskPulse Enterprise keeps disk change monitoring statistics for the last 10 days. In order to change the history statistics configuration options, connect to DiskPulse Enterprise using the client GUI application and open the 'Options' dialog.


26 Web-Based Management Interface

DiskPulse Enterprise provides a complete web-based management interface allowing one to control, configure and manage one or more DiskPulse Servers using a regular web browser from any computer on the network.

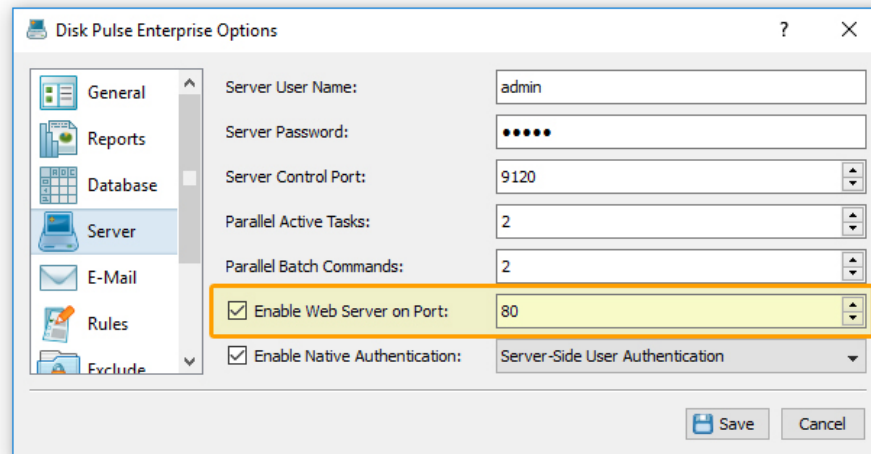

In order to enable the web-based management interface for a DiskPulse Enterprise installation, connect to the server using the DiskPulse client GUI application, open the 'Options' dialog, select the 'Server' tab, enable the 'Web Server' option and press the 'Save' button.


By default, the DiskPulse web server uses the TCP/IP port 80, which is a standard port used by web browsers to connect to web servers. Sometimes, the standard web access port may be in use by other applications or services installed on the server, preventing the DiskPulse web interface to operate properly. In this case, the user needs to change the web access port number and then, in order to connect to the custom port, type in the web browser address bar: `http://server-name:port-number`.

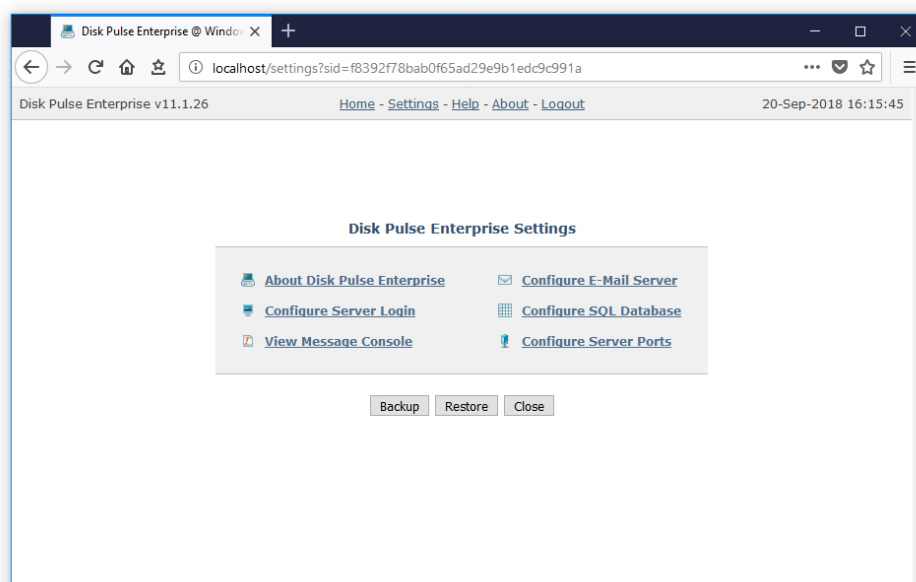


The DiskPulse Enterprise web-based interface is a dynamic web application, which automatically updates the status of active disk change monitoring operations, and in order to operate properly, the web-based interface requires JavaScript to be enabled in the web browser.

27 DiskPulse Server Disk Space Monitor

DiskPulse Server and DiskPulse Enterprise include a built-in disk space monitor allowing one to monitor the free disk space in a number of disks or directories and provides the ability to send E-Mail notifications and save disk change monitoring reports showing created or modified files and/or execute custom actions when the amount of the free disk space drops below or rises above a user-specified limit.

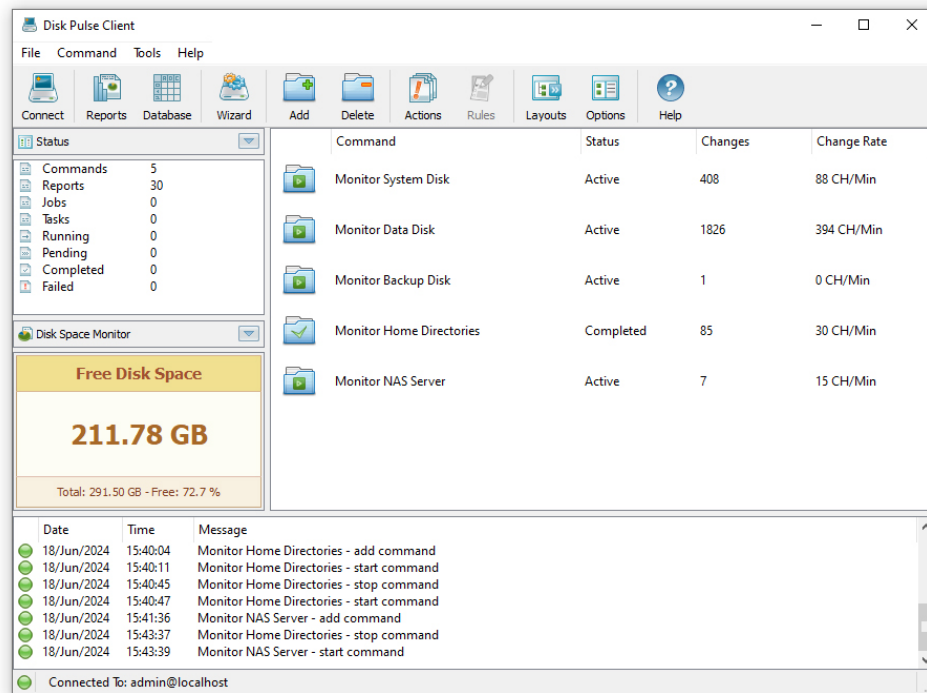


The disk space monitor can be displayed in any of the left-side tool panes of the DiskPulse client GUI application. By default, the disk space monitor shows the status of all local disks in the server. In order to open the disk space monitors dialog, double click on the disk space monitor tool pane. For each disk, the disk space monitors dialog shows the disk name, the total amount of the disk space, the amount of the free disk space and the disk status according to the configuration of the disk space monitor.

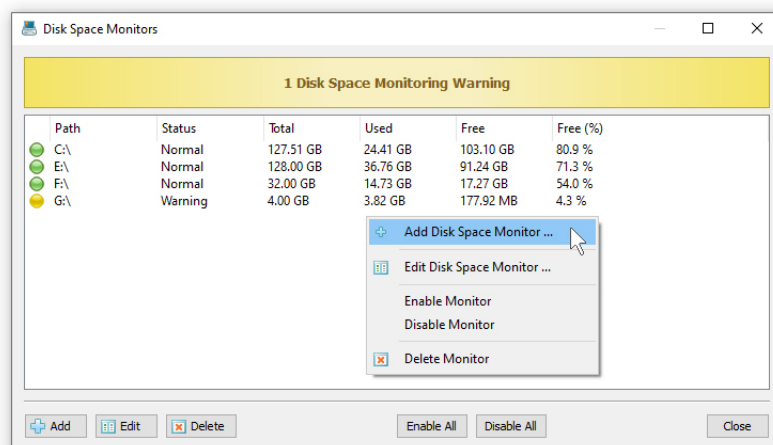


In order to add an additional disk or directory to the disk space monitor, press the right mouse button over the disk space monitor pane, specify the name of a disk or directory to monitor and press the 'Ok' button. In order to change the configuration of a previously created disk space monitor, select the required disk item in the disk space monitor pane, press the right mouse button and select the 'Edit Monitor' menu item.

For each monitored disk, the disk space monitor allows one to control the disk space monitoring frequency, the maximum number of monitoring errors and disk space monitoring actions and/or E-Mail notifications. Sometimes, when monitoring the disk space usage in remote servers or NAS storage devices via the network, a network server or NAS storage device may be temporary offline due to unexpected connectivity or hardware problems. In this case, the disk space monitor will mark such a disconnected device as 'Offline' and continue to monitor the server according to the user-specified maximum number of errors. On the other hand, if a network server or NAS device was permanently disconnected from the network, the disk space monitor will disable monitoring of the disconnected server after the user-specified number of monitoring errors.

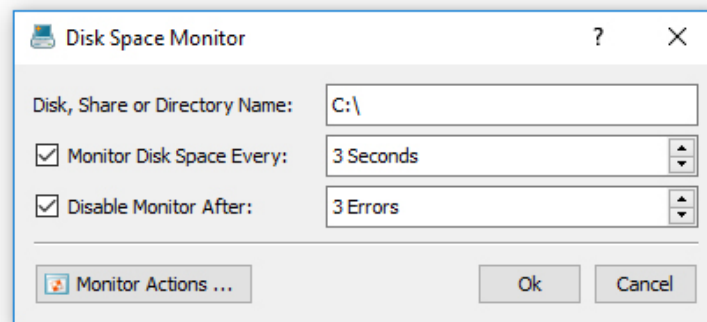


In order to automatically send an E-Mail notification and/or execute a custom action when the amount of the free disk space drops below a user-specified limit, the user needs to configure one or more disk space monitoring actions. Open the disk space monitor dialog, press the 'Monitor Actions' button, specify the minimum amount of the free disk space to trigger the action, select the 'Send Notification' option, select an appropriate notification format and specify an E-Mail address to send the notification to. In addition, in order to enable E-Mail notifications, the user needs to open the main options dialog, select the 'E-Mail' tab and configure an E-Mail server to use to send E-Mail notifications.

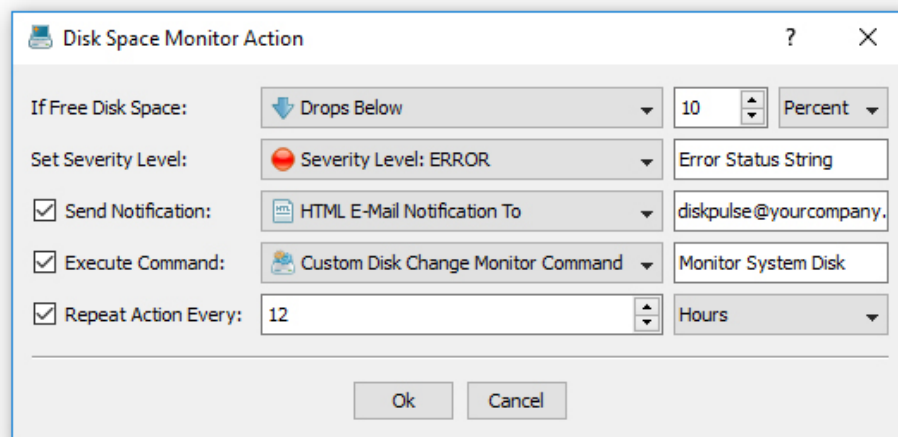

In addition to E-Mail notifications, the user is provided with the ability to automatically start a disk change monitoring operation, which will monitor all created or modified files and save disk change monitoring reports in the DiskPulse Server reports database. If the user selects the 'Default Disk Change Monitor Command' option, the disk space monitor will automatically create a disk change monitoring command configured to monitor all disk changes and save disk change monitoring reports in the DiskPulse Server reports database. If the user selects the 'Custom Disk Change Monitoring Command' option, the disk space monitor will execute the user-configured disk change monitoring command. Finally, if the user selects the 'User Command, Script or Batch File' option, the disk space monitor will execute the user-custom command, script or batch file.

28 Using DiskPulse Server Command Line Utility

DiskPulse Server provides a command line utility allowing one to control one or more servers locally or through the network using batch files and shell scripts. The DiskPulse command line utility is located in the '**<ProductDir>\bin**' directory.

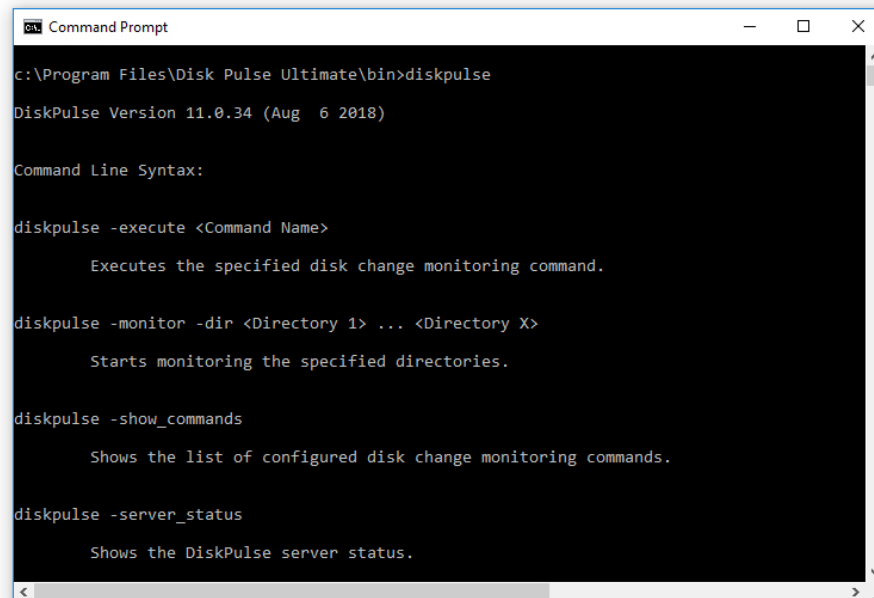

```
Command Prompt

c:\Program Files\Disk Pulse Ultimate\bin>diskpulse

DiskPulse Version 11.0.34 (Aug 6 2018)

Command Line Syntax:

diskpulse -execute <Command Name>

    Executes the specified disk change monitoring command.

diskpulse -monitor -dir <Directory 1> ... <Directory X>

    Starts monitoring the specified directories.

diskpulse -show_commands

    Shows the list of configured disk change monitoring commands.

diskpulse -server_status

    Shows the DiskPulse server status.
```

DiskPulse Server Command Line Utility Commands:

diskpulse -server_show_commands

This command shows disk change monitoring commands configured in the DiskPulse server.

diskpulse -server_execute_command <Command Name>

This command synchronously executes the specified disk change monitoring command.

diskpulse -server_start_command <Command Name>

This command starts the specified disk change monitoring command and exists.

diskpulse -server_start_all_commands

Starts all inactive disk change monitoring commands.

diskpulse -server_pause_command <Command Name>

This command pauses an active disk change monitoring command.

diskpulse -server_reset_command <Command Name>

This command resets and clears detected file system changes from an active disk change monitoring command.

diskpulse -server_stop_command <Command Name>

This command stops an active disk change monitoring command.

diskpulse -server_stop_all_commands

Stops all active disk change monitoring commands.

diskpulse -server_delete_command <Command Name>

Deletes the specified disk change monitoring command.

diskpulse -server_delete_all_commands

Deletes all configured disk change monitoring commands.

diskpulse -server_show_changes <Command Name>

This command shows file system changes detected by a disk change monitoring command.

diskpulse -server_save_report <Command Name> -format <Report Format>

This command saves file system changes detected by a disk change monitoring command to a report file according to the specified report format, which may be set to one of the following values: HTML, TEXT, JSON, CSV, XML, PDF and FLR (the native DiskPulse report format). In addition, the command line utility provides the **'-report'** command line option, which may be used to specify a file name or a directory name to save the report to. If no file name or directory name is specified, the report will be saved in the user's home directory with an automatically generated file name including the current date and time.

diskpulse -server_save_to_database <Command Name>

This command saves detected changes to the SQL database configured on the 'Options' dialog.

diskpulse -server_command_status <Command Name>

This command shows the status of the specified disk change monitoring command.

diskpulse -server_status

This command shows the DiskPulse Server debug status.

diskpulse -server_show_debug_log

This command shows the DiskPulse Server debug message log.

diskpulse -server_clear_debug_log

This command clears the DiskPulse Server debug message log.

diskpulse -server_set_user <User Name>

This command sets the DiskPulse Server user name. In order to reset a forgotten user name, execute the command locally on the same host where the DiskPulse server is installed on.

diskpulse -server_set_password <Password>

This command sets the DiskPulse Server password. In order to reset a forgotten password, execute the command locally on the same host where the DiskPulse server is installed on.

diskpulse -server_set_port <Server Control Port>

This command sets the DiskPulse server control port (default is 9120). After executing this command, the DiskPulse service should be restarted. In order to be able to connect to the server through the network the server control port should be open in the server's firewall.

diskpulse -server_export_config <Configuration File Name>

This command exports the DiskPulse Server configuration to the specified file.

diskpulse -server_import_config <Configuration File Name>

This command imports the DiskPulse Server configuration from the specified file.

diskpulse -server_register_online -customer <Customer Name> -key <Unlock Key> -servers <Server1;Server2;ServerX>

This command performs the online product registration procedure for one or more DiskPulse servers via the network. The command should be executed on a host directly connected to the Internet. Internet access for the registered DiskPulse servers is not required.

diskpulse -server_export_product_id -directory <Directory> -customer <Customer> -key <Unlock Key> -servers <Server1;Server2;ServerX>

This command exports product ID files from one or more DiskPulse Servers to the specified directory.

diskpulse -server_import_unlock_file -directory <Directory>

This command performs the manual product registration procedure via the network using unlock files located in the specified directory.

Optional Command Line Parameters:**-host <Host Name>**

Sets the host name of the DiskPulse server to connect to (default is localhost).

-port <Port Number>

Sets the DiskPulse server control port number to connect to (default is 9120).

-user <User Name>


Sets the DiskPulse server user name to login with (default is 'admin').

-password <Password>

Sets the DiskPulse server password to login with (default is 'admin').


29 Configuring DiskPulse Server

DiskPulse Server provides a variety of configuration options allowing one to easily integrate the product into a user-specific network environment. In order to open the main options dialog, press the 'Options' button located on the main toolbar.

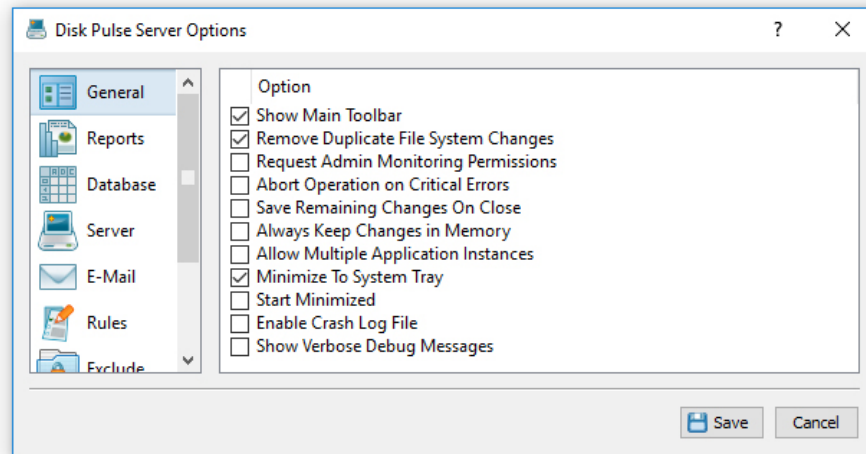

30 Configuring Custom User Name, Password and Ports

The DiskPulse client GUI application requires users to login with a DiskPulse user name and password. The default user name and password is set to **admin/admin**. In addition, DiskPulse Server provides the ability to set a custom user name and/or password for the DiskPulse client GUI application and the command line utility, which may be used to automate configuration and management tasks. In order to set a custom user name and password, open the main options dialog, select the 'Server' tab, specify a new user name and password and press the 'Save' button.

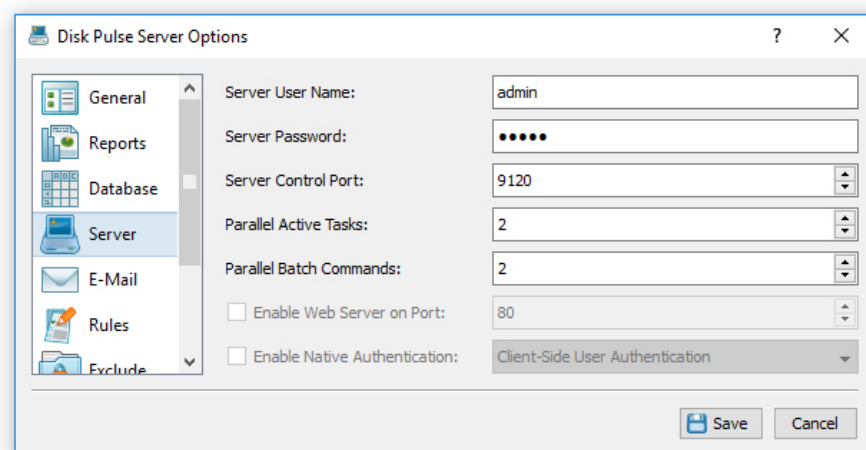


DiskPulse Server uses the TCP/IP port 9120 as the default server control port and the TCP/IP port 80 as the default web access port. Sometimes, these ports may be in use by some other software products or system services. If one or both of these ports are in use, DiskPulse Server will be unable to operate properly and the user needs to change the DiskPulse server control port and/or web access port. In order to set a custom server control port and/or web access port, open the main options dialog, select the 'Server' tab and enter a custom server control port or web-access port to use. If the DiskPulse server should be controlled through the network, make sure the server control port and the web access port are open in the server's firewall.

31 DiskPulse Server Report Management


In addition, DiskPulse Server allowing one to customize the following of report management options:

- **Keep in Reports Directory** - this option specifies how many report files to keep in a reports directory specified for a disk change monitoring command.
- **Keep in Reports Database** - this option specifies how many disk change monitoring reports to keep in the DiskPulse internal reports database.
- **CSV Reports Delimiter** - this option allows one to customize the delimiter character used in CSV reports as the column delimiter.
- **Report Files Date Format** - this option allows one to customize the date/time format used in all types of disk change monitoring reports.

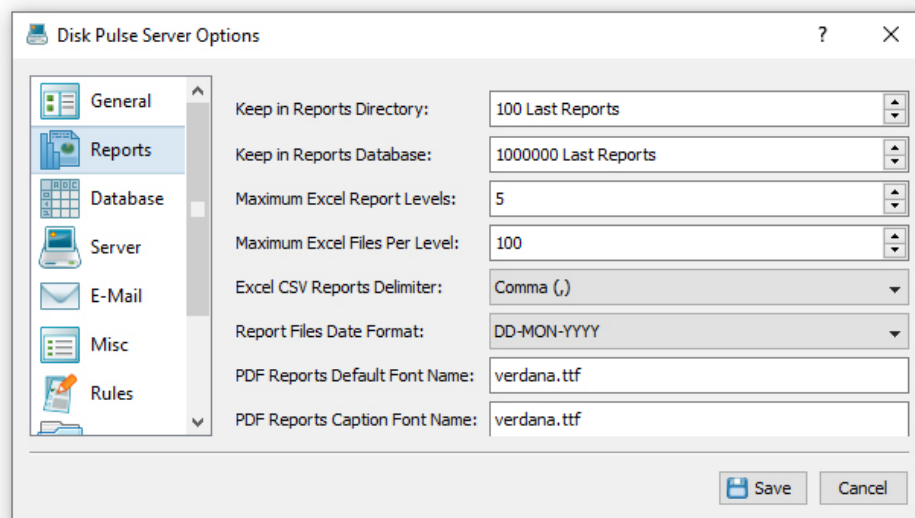


32 Configuring E-Mail Server

In order to be able to send E-Mail notifications, open the main options dialog, select the 'E-Mail' tab, enable E-Mail notifications, enter the SMTP server host name, port, user name, password and the source E-Mail address to use to send E-Mail notifications. Optionally, enable the secure SMTP connection mode and select an appropriate security algorithm.

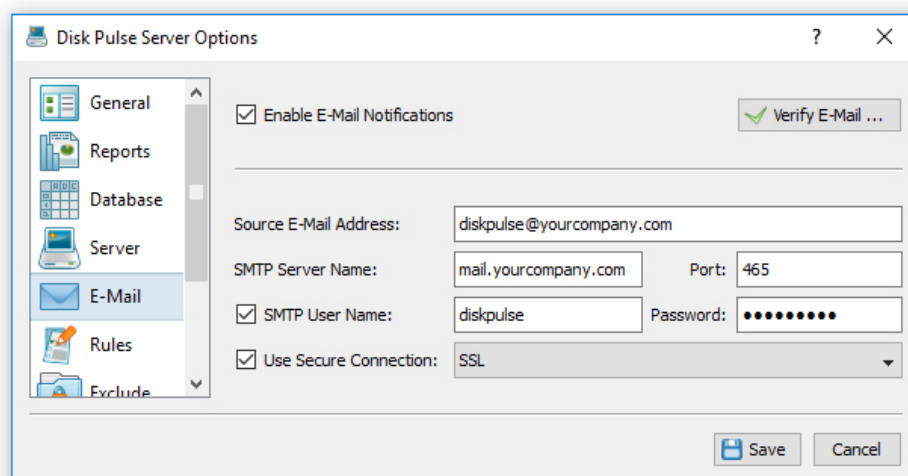


33 Updating DiskPulse Server

Flexense develops DiskPulse Server using a fast release cycle with minor product versions, updates and bug fixes released every month and major product versions released every year. New product versions and product updates are published on the product web site and may be downloaded from the following page: <https://www.diskpulse.com/downloads.html>.

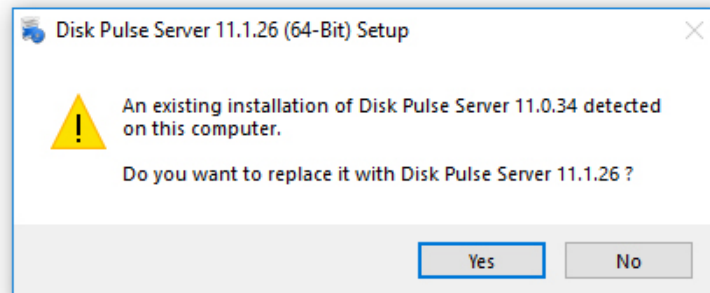


Due to the fact that the product is especially designed for servers running in production environments where stability is a major decision factor, DiskPulse Server updates should be manually installed by the user. In order to update an existing product installation, download the latest product version and just start the setup program.

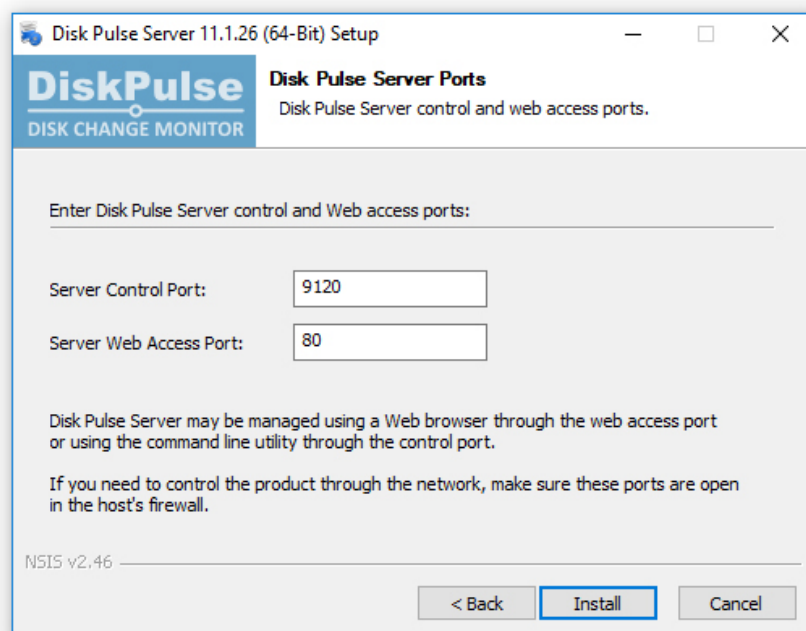


The DiskPulse Server setup program will properly shutdown the running DiskPulse service, update the product and restart the DiskPulse service after finishing the update procedure. All product configuration files, configured disk change monitoring commands, saved disk change monitoring reports and product registration will remain valid and there is nothing to reconfigure or manage after the update.

34 Registering DiskPulse Server


Within a couple of hours after purchasing a product license, the customer will receive two e-mail messages: the first one confirming the payment and the second one containing an unlock key, which should be used to register the product. If you will not receive your unlock key within 24 hours, please check your spam box and if the unlock key is not in the spam box contact our support team: **support@flexense.com**.

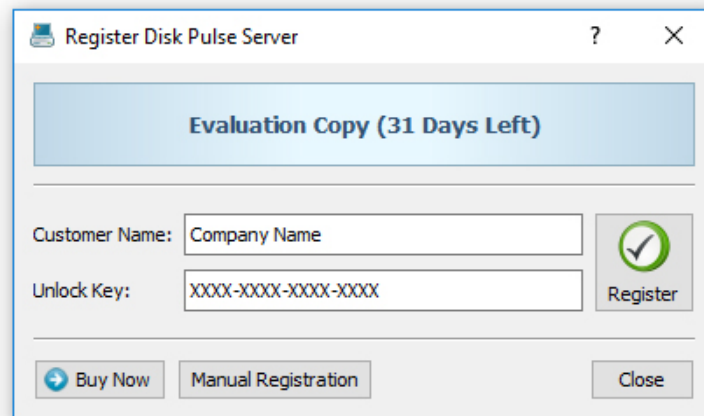

If the computer where DiskPulse Server is installed on is connected to the Internet, open the DiskPulse client GUI application, press the 'Register' button located in the top-right corner of the window, enter your name or your company name, enter the received unlock key and press the 'Register' button.

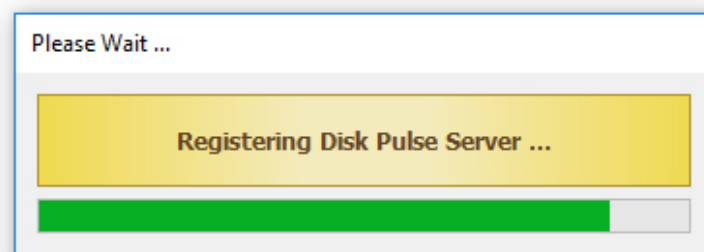

If the computer is not connected to the Internet, press the 'Manual Registration' button, export the product ID file and send the product ID file to **register@diskpulse.com** as an attachment. Within a couple of hours, you will receive an unlock file, which should be imported in order to finish the product registration procedure.

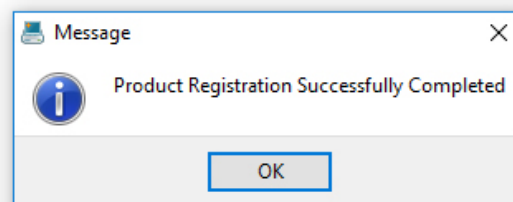

35 DiskPulse Enterprise OEM Version

Flexense provides system integrators, value-added distributors and IT service providers with the ability to resell DiskPulse Enterprise and/or provide services based on the product under third-party brand names. Resellers and integrators are provided with the ability to change the product name, the product web site address, the product vendor name and the product vendor web site address.

The screenshot shows a web browser window with the title 'OEM Product Name @ Window'. The address bar shows 'localhost/set_oem_info?sid=3ce47673f30275cd7c6bdcede75db46d'. The page header displays 'OEM Product Name v11.1.26', navigation links 'Home - Settings - About - Logout', and a timestamp '25-Sep-2018 14:58:09'. The main content area features a 'Set OEM Info' dialog box with the following fields:

Set OEM Info	
OEM Vendor Name:	OEM Vendor Name
OEM Vendor URL:	http://www.yourcompany.com
OEM Product Name:	OEM Product Name
OEM Product URL:	http://www.yourproduct.com

At the bottom of the dialog are 'Save' and 'Cancel' buttons.

In order to be able to set custom OEM product and vendor information, the user needs to register the product using a special OEM-Enabled unlock key, which may be purchased on the product purchase page. Once the product is registered using an OEM unlock key, open the 'About' page, press the 'Set OEM Info' button, specify your custom OEM product and vendor information and press the 'Save' button.

The screenshot shows the same web browser window, but the address bar now shows 'localhost/about?sid=3ce47673f30275cd7c6bdcede75db46d'. The page header shows the same navigation links and a timestamp '25-Sep-2018 14:57:41'. The main content area features an 'About OEM Product Name' dialog box with the following information:

About OEM Product Name	
Product:	OEM Product Name v11.1.26
License:	Registered To OEM
Vendor:	OEM Vendor Name
Build Date:	Sep 7 2018 11:42:58
Build OS:	Windows (64-Bit) (Release)
Install Date:	20/09/2018
Memory Usage:	10.82 MB


At the bottom of the dialog are 'Set OEM Info' and 'Close' buttons.

Custom OEM product and vendor information will be displayed on all pages of the DiskPulse web-based management interface, in all types of reports generated by the product and all notification E-Mail messages sent by DiskPulse Enterprise.

36 Installing MySQL Database

DiskPulse Server is capable of saving disk change monitoring reports in an SQL database. Reports may be saved manually or automatically using conditional report generation actions triggered when a user-specified number of changes detected in a disk or directory. SQL Database integration is available in DiskPulse Server and DiskPulse Enterprise.


In order to configure DiskPulse to use the MySQL database, the user needs to install the following two components: the MySQL Server and the MySQL ODBC connector. First of all, let's install the MySQL Server. Download the latest version of the MySQL server from the MySQL web site and execute the setup program to start the installation procedure. On the setup type page, select the 'Typical' setup type and press the 'Next' button. By default, the setup will install the MySQL server and a command line utility, which will be used to configure the MySQL server.

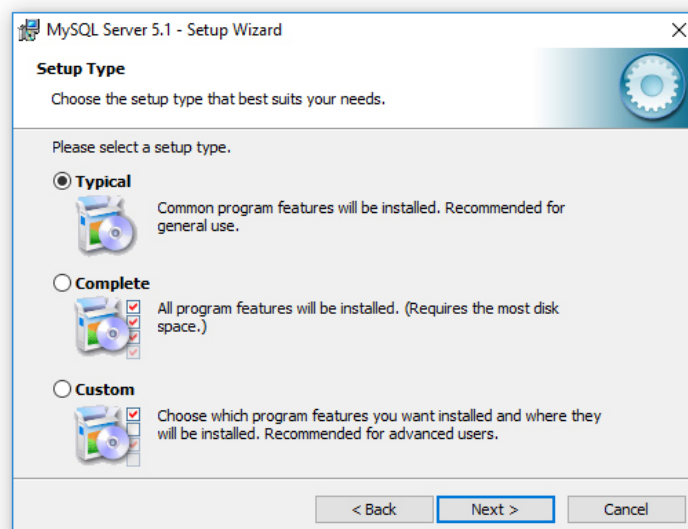


On the next setup page, select the 'Configure the MySQL Server now' option and press the 'Finish' button. The setup program will open a MySQL configuration wizard allowing one to configure basic server settings.




On the next setup page, select the 'Detailed Configuration' option and press the 'Next' button. The detailed configuration mode is required to configure the MySQL server for maximum database performance.

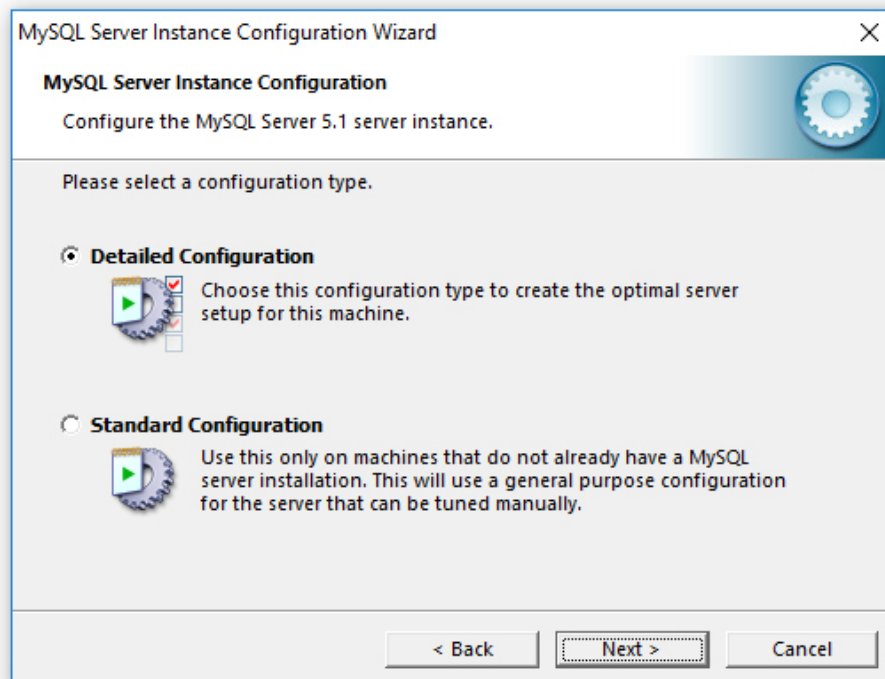


On the next page, select the 'Server Machine' option, which is the most balanced configuration for typical DiskPulse Server and DiskPulse Enterprise workloads. If the server is intended to process large volumes of reports and is dedicated for DiskPulse Enterprise, select the 'Dedicated Server' configuration option.

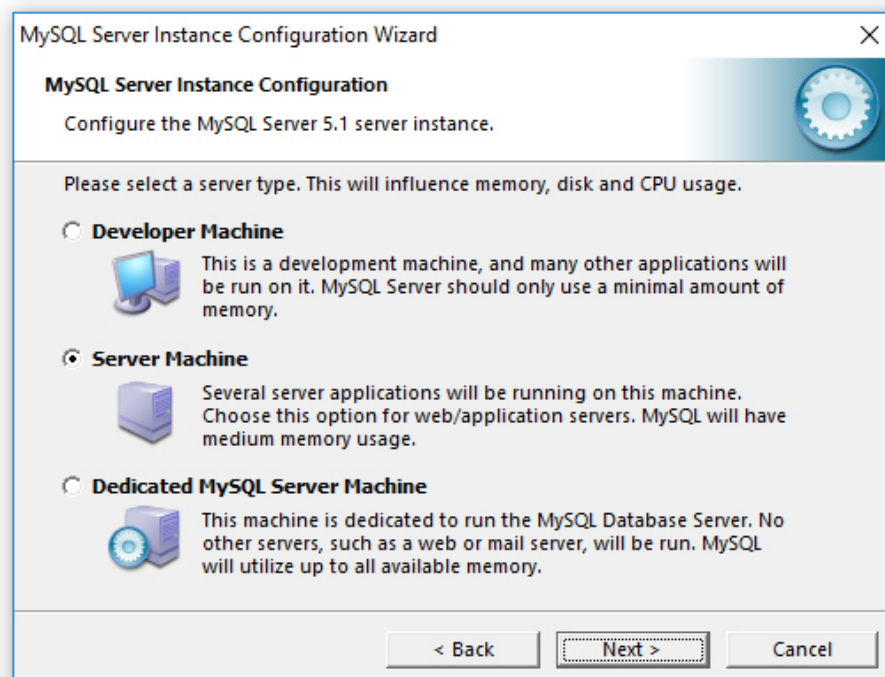


On the next page, select the 'Non-Transactional Database' option. DiskPulse does not perform concurrent insert or modify operations on the database and a transactional database is not required. Moreover, configuring the MySQL server as a non-transactional database will significantly improve the performance of database import operations.

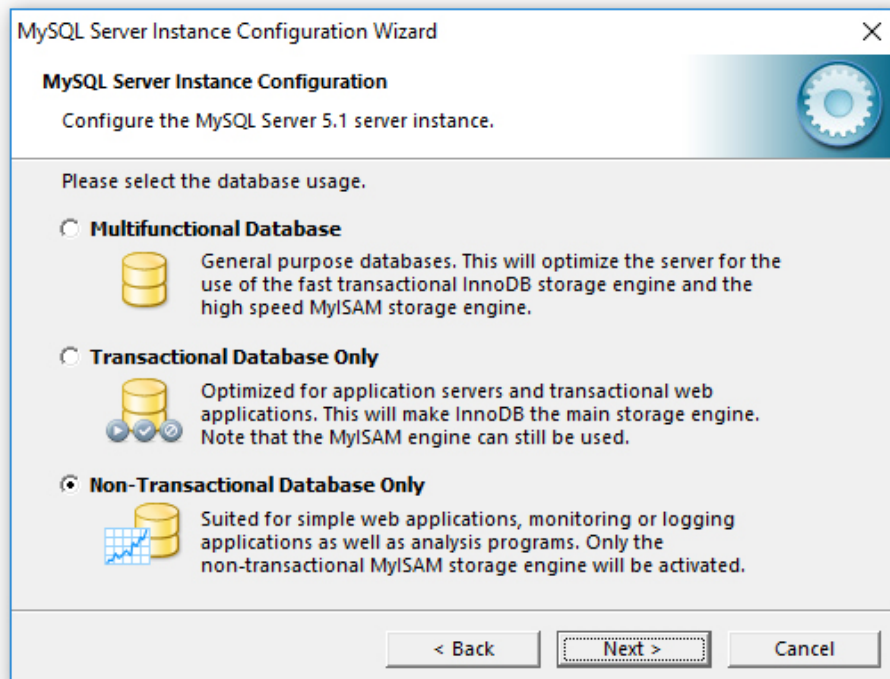


On the next page, select the 'Manual Setting' option and set the number of concurrent database connections to 5, which is the optimal number for DiskPulse Server and DiskPulse Enterprise installations.

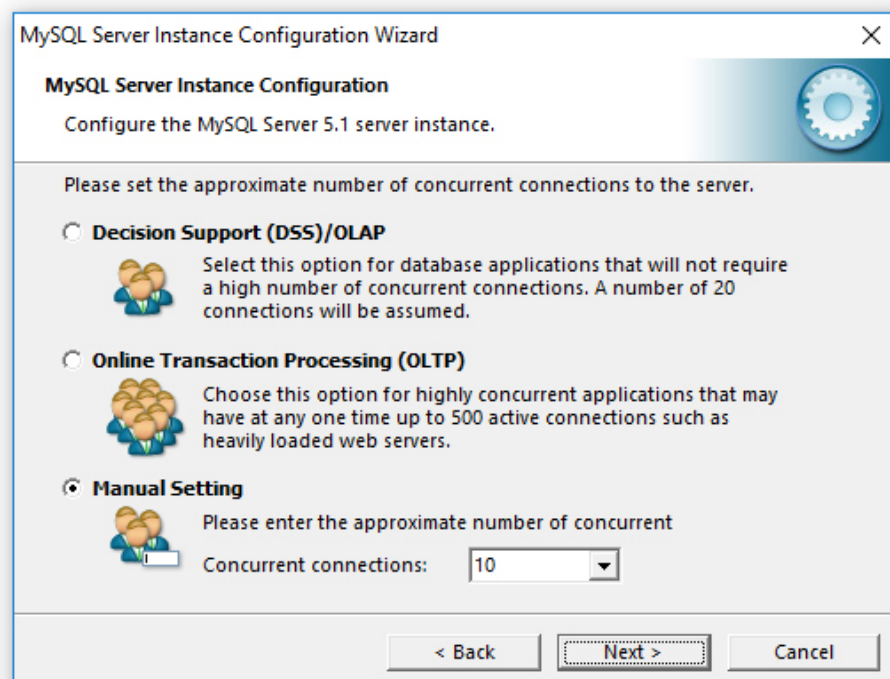


On the next page, enable TCP/IP networking and if the server will be accessed from other computers on the network, add a firewall exception for the MySQL server port. In general, a single MySQL server may be used to collect reports from multiple DiskPulse Servers using remote ODBC connections.

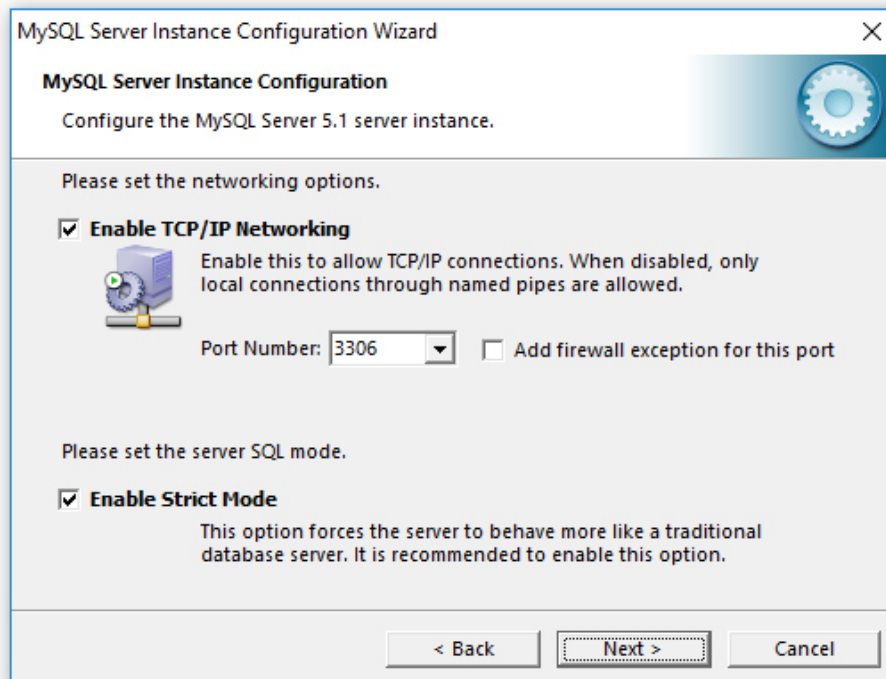


On the next page select an appropriate character set. By default, DiskPulse uses the UTF-8 character set to store names of files and directories, but if there is no need to process Unicode file names, this option may be set to the standard Latin1 character set.

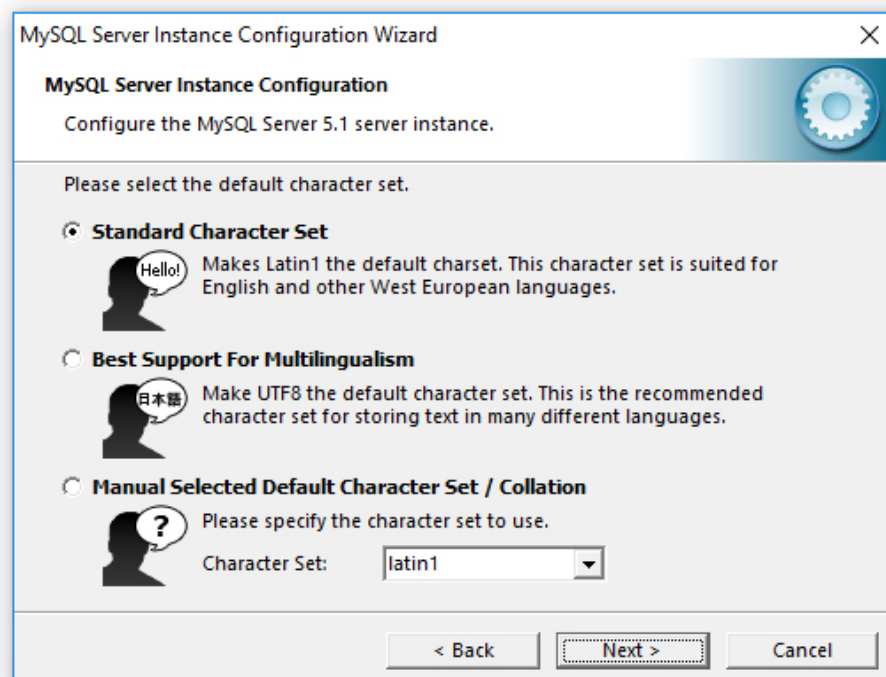

On the next page, select the 'Install as Windows Service' option and select the 'Include Bin Directory in Windows PATH' option. The PATH option will enable execution of the MySQL command line utility from any location.

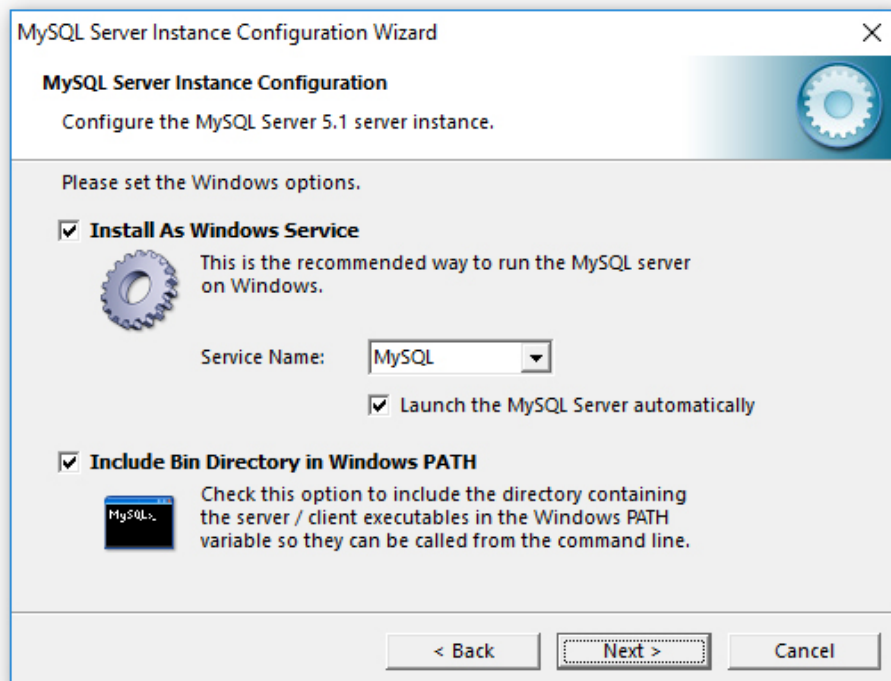


On the next page, select the 'Modify Security Settings' option and specify a root password for the MySQL server, which later will be used to configure regular MySQL users.

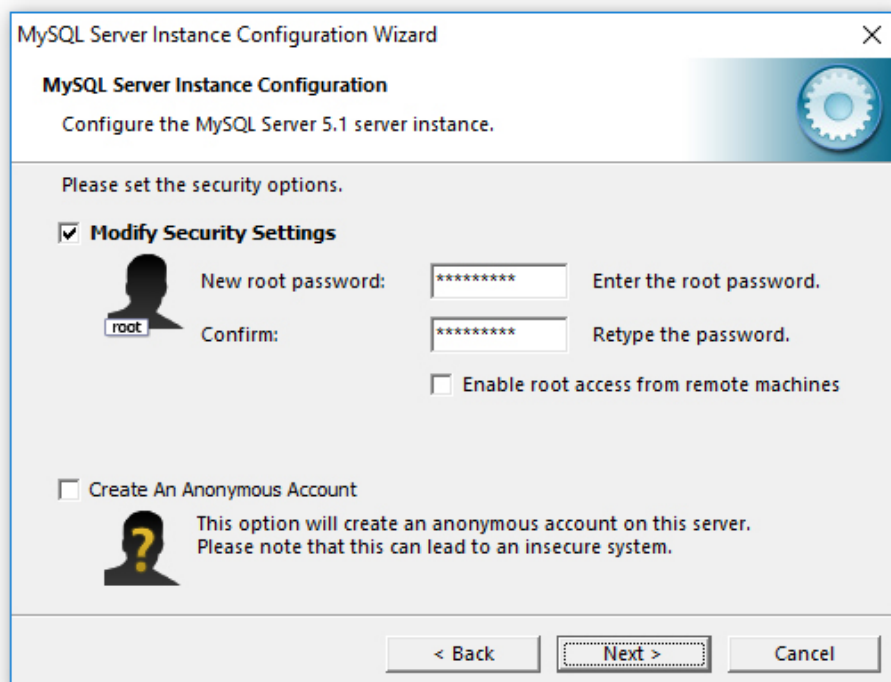

That's all. Press the 'Next' button to finish the installation procedure.

37 Configuring MySQL Database

The MySQL database provides the 'mysql' command line utility, which may be used to configure the database and the user account to be used by DiskPulse.

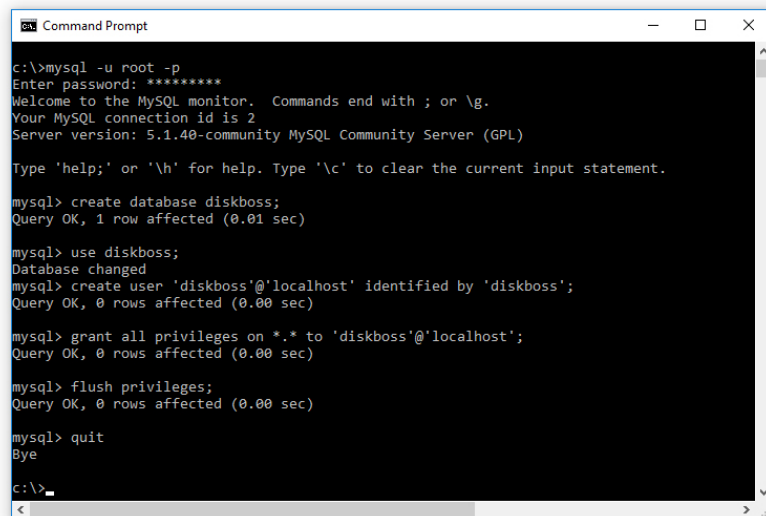

```
c:\>mysql -u root -p
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 2
Server version: 5.1.40-community MySQL Community Server (GPL)

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> create database diskboss;
Query OK, 1 row affected (0.01 sec)

mysql> use diskboss;
Database changed
mysql> create user 'diskboss'@'localhost' identified by 'diskboss';
Query OK, 0 rows affected (0.00 sec)

mysql> grant all privileges on *.* to 'diskboss'@'localhost';
Query OK, 0 rows affected (0.00 sec)

mysql> flush privileges;
Query OK, 0 rows affected (0.00 sec)

mysql> quit
Bye
c:\>
```

In order to configure the MySQL database, open the command prompt window and type the following command:

```
mysql -u root -p
```

This command will start the 'mysql' command line utility and login to the MySQL server with root permissions. The user will be asked to provide the root password, which was specified during the MySQL server installation procedure.

Once logged in, the user needs to create a database that will be used by DiskPulse to store disk change monitoring reports. In order to do that, type the following command:

```
create database diskpulse;
```

Now, add a user account that will be used by DiskPulse to submit reports to the database. Single quotes are required and should be specified exactly as displayed.

```
create user 'diskpulse'@'localhost' identified by 'password';
```

Now, grant permissions to the user account using the following command:

```
grant all privileges on *.* to 'diskpulse'@'localhost';
```


Finally, flush user privileges using the following command.

```
flush privileges;
```


That's all. Now the MySQL server is fully configured. In order to disconnect from the MySQL database, just type **quit** in the command window.

38 Installing and Configuring MySQL ODBC Data Source


DiskPulse connects to the MySQL database through the ODBC interface. Download an appropriate version of the MySQL ODBC connector from the MySQL web site and execute the setup program. There are no critical configuration options in the MySQL ODBC connector installation procedure and the user can just press the 'Next' button until the last page keeping the default configuration options.

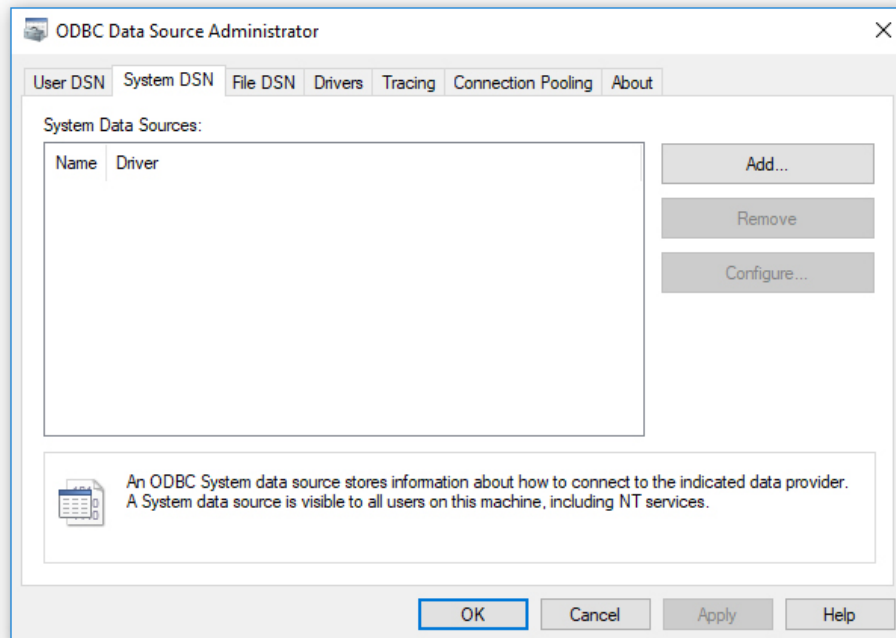

After finished installing MySQL ODBC Connector, open the Windows control panel and select 'Administrative Tools – Data Sources (ODBC)'. On the ODBC Administrator window, select the 'System DSN' tab and press the 'Add' button. On the next page, select the 'MySQL ODBC Driver' and press the 'Finish' button.

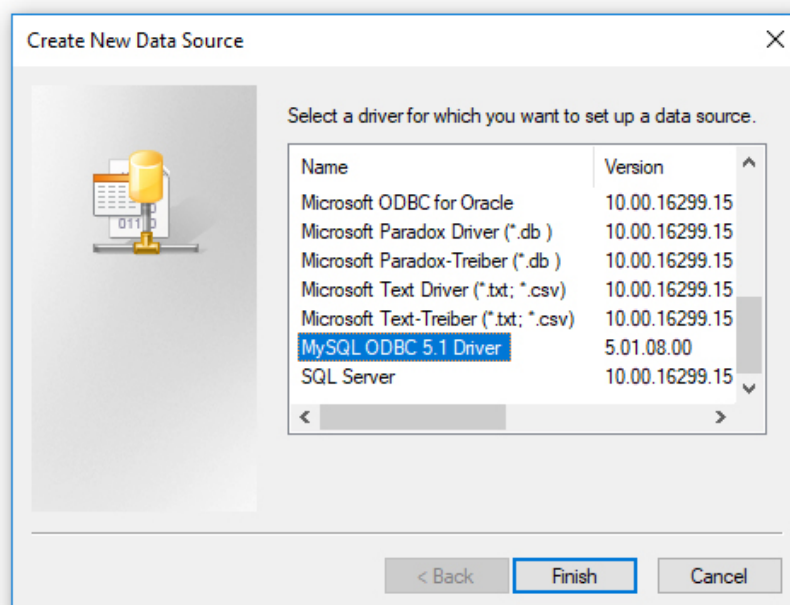


On the next page, enter a new data source name, which will be used by DiskPulse to connect to the database. Specify the name of the host where the MySQL server is running on and enter the MySQL user name and password that should be used by DiskPulse to connect to the database. Finally, select the name of the database that should be used to store disk change monitoring reports. After finished specifying all the required information, press the 'Test' button to check the database connection.

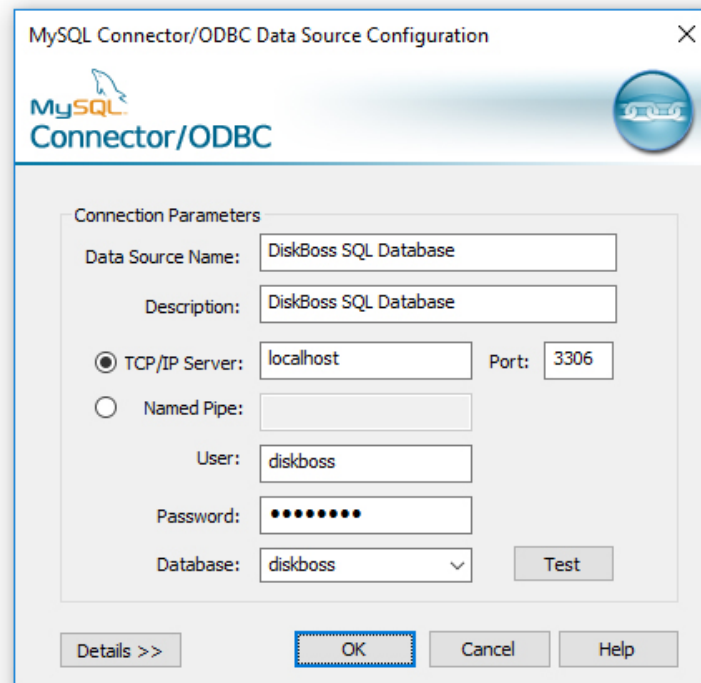

39 Configuring DiskPulse Database Connection

In order to configure DiskPulse to use the installed MySQL database, open the options dialog and select the 'Database' tab. Enable the ODBC interface and enter the name of the ODBC data source, the database user name and password that were specified for the ODBC data source. Finally, press the 'Verify' button to check the DiskPulse database connection.

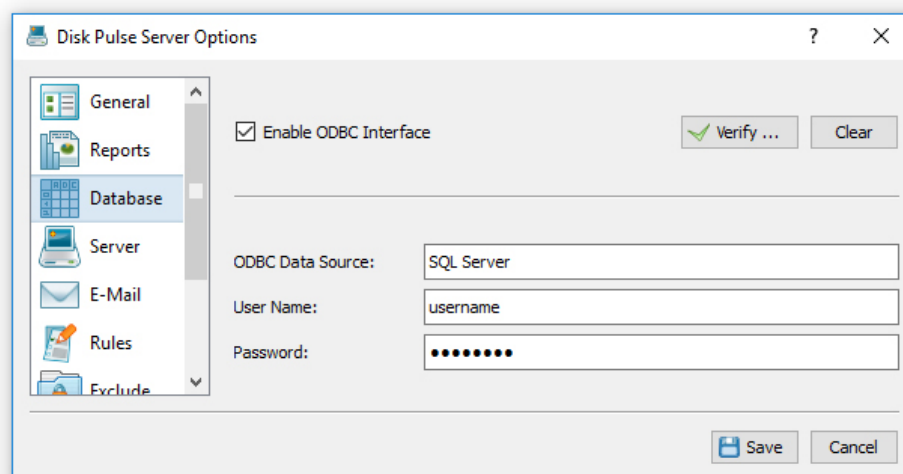

40 Supported Operating Systems

- Server 2025
- Server 2022
- Server 2019
- Server 2016
- Server 2012 R2
- Server 2012
- Server 2008 R2
- Server 2008
- Server 2003
- Windows 11
- Windows 10
- Windows 8.1
- Windows 8
- Windows 7
- Windows Vista
- Windows XP

41 System Requirements

Minimal System Requirements

- Supported Operating System
- 2 GHz or better dual-core CPU
- 4 GB of system memory
- 100 MB of free disk space

Recommended System Configuration

- 64-Bit Operating System
- 2 GHz or better dual-core CPU
- 4 GB of system memory
- 200 MB of free disk space

DiskPulse Enterprise System Configuration

- 64-Bit Operating System
- 2 GHz+ quad-core CPU
- 8 GB of system memory
- 1 GB of free disk space